Intelligent ANPR Camera

User Manual

Legal Information

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (***https://www.hikvision.com***). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.
- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

- This product can only enjoy the after-sales service support in the country or region where the purchase is made.
- If the product you choose is a video product, please scan the following QR code to obtain the "Initiatives on the Use of Video Products", and read it carefully.

Acknowledgment of Intellectual Property Rights

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR

IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
Danger	Indicates a hazardous situation which, if not avoided, will or could result in death or serious injury.
Caution	Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
Note	Provides additional information to emphasize or supplement important points of the main text.

Contents

Chapter 1 Activation and Login 1
1.1 Activation 1
1.1.1 Default Information 1
1.1.2 Activate via SADP 1
1.1.3 Activate via Web Browser 2
1.2 Login 3
1.3 Download Plug-in 4
Chapter 2 Network Configuration 5
2.1 Set IP Address 5
2.2 Set Port 6
2.3 Set IEEE 802.1X 8
2.4 Set DDNS 9
2.5 Set mDNS 10
2.6 Set SNMP 10
2.7 Set QoS 12
2.8 Connect to Platform 12
2.8.1 Set Arm Host 12
2.8.2 Set SDK Listening 12
2.8.3 Set FTP 13
2.8.4 Set ISAPI Listening 15
2.8.5 Connect to ISUP Platform 16
2.8.6 Connect to OTAP 18
2.8.7 Connect to Hik-Connect 19
2.8.8 Set Integration Protocol 22
2.8.9 Set Cloud Storage 23
Chapter 3 Quick Configuration 24

3.1 Set Basic Parameters 24
3.2 Draw Lane Lines 27
3.3 Set Allowlist and Blocklist 28
Chapter 4 Entrance and Exit Configuration 30
4.1 Set Barrier Gate Linkage 30
4.1.1 Set Allowlist and Blocklist 30
4.1.2 Control Barrier Gate 31
4.1.3 Pass Control 34
4.2 Set Wiegand Parameters 35
4.3 Set Custom License Plate Mapping 37
4.4 Set Main and Sub-Camera Mode 38
Chapter 5 Capture Configuration 40
5.1 Set Capture Parameters 40
5.1.1 Set License Plate Recognition Parameters 40
5.1.2 Set Vehicle Feature Parameters 41
5.1.3 Set Supplement Light Parameters 41
5.1.4 Set Capture Overlay 43
5.1.5 Set Image Encoding Parameters 44
5.1.6 Set Capture Schedule 45
5.2 Set Captured Image Parameters 46
5.3 Advanced Configuration 48
5.3.1 System Service 48
5.3.2 Vehicle Capture and Recognition Service 48
Chapter 6 View Real-Time Picture 51
Chapter 7 Live View and Local Configuration 54
7.1 Live View 54
7.1.1 Start/Stop Live View 54
7.1.2 Select Image Display Mode 54

7.1.3 Select Window Division Mode 54
7.1.4 Select Stream Type 54
7.1.5 Capture Picture Manually 54
7.1.6 Record Manually 54
7.1.7 Enable Digital Zoom 55
7.1.8 Select Video Mode 55
7.2 Set Snapshot Mode 55
7.3 Local Configuration 56
Chapter 8 Record and Capture 60
8.1 Set Storage Media 60
8.2 Set Record Schedule 61
8.3 Set Snapshot Schedule 63
Chapter 9 Playback 64
Chapter 10 Encoding and Display 65
10.1 Set Camera Parameters 65
10.2 Set OSD 68
10.3 Set Video Encoding Parameters 70
10.4 Set ROI 71
10.5 Set Privacy Mask 72
10.6 Enable Regional Exposure 73
Chapter 11 Event and Alarm 74
11.1 Exception Alarm 74
11.2 Set Email 74
11.3 Set Email Event 75
11.4 Set Cabinet Alarm 75
Chapter 12 Safety Management 77
12.1 Manage User 77
12.2 Enable User Lock 78

12.3 Set SSH 78
12.4 Prohibit PING 79
12.5 Set SDK Protocol Authentication Mode 79
12.6 Set RTSP Authentication 79
12.7 Set Timeout Logout 79
12.8 Set Password Validity Period 80
12.9 Set IP Address Filtering 80
12.10 Set HTTPS 81
12.10.1 Create and Install Self-signed Certificate 81
12.10.2 Install Authorized Certificate 81
Chapter 13 Maintenance 82
13.1 View Device Information 82
13.2 Synchronize Time 82
13.3 Set DST 83
13.4 Set RS-485 84
13.5 Set RS-232 84
13.6 Download Debug Data 85
13.7 Search Log 86
13.8 Reboot 86
13.9 Restore Parameters 87
13.10 Export Parameters 87
13.11 Import Configuration File 87
13.12 Upgrade 88

Chapter 1 Activation and Login

1.1 Activation

For the first-time access, you need to activate the device by setting an admin password. No operation is allowed before activation. The device supports multiple activation methods, such as activation via SADP software, web browser, and iVMS-4200 Client.

Note

Refer to the user manual of iVMS-4200 Client for the activation via client software.

1.1.1 Default Information

Device default information are as follows.

- Default IP address: 192.168.1.64
- Default port: 8000
- Default user name: admin

1.1.2 Activate via SADP

SADP is a tool to detect, activate, and modify the IP address of the devices over the LAN.

Before You Start

- Get the SADP software from the supplied disk or the official website (***https://www.hikvision.com/***), and install it according to the prompts.
- The device and the computer that runs the SADP tool should belong to the same network segment.

The following steps show how to activate one device and modify its IP address. For batch activation and IP address modification, refer to *User Manual of SADP* for details.

Steps

1. Run the SADP software and search the online devices.
2. Find and select your device in online device list.
3. Enter a new password (admin password) and confirm the password.

Caution

STRONG PASSWORD RECOMMENDED-We highly recommend you create a strong password of your own choosing (using a minimum of 8 characters, including upper case letters, lower case letters, numbers, and special characters) in order to increase the security of your product. And

we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.

4. Click **Activate** to start activation.

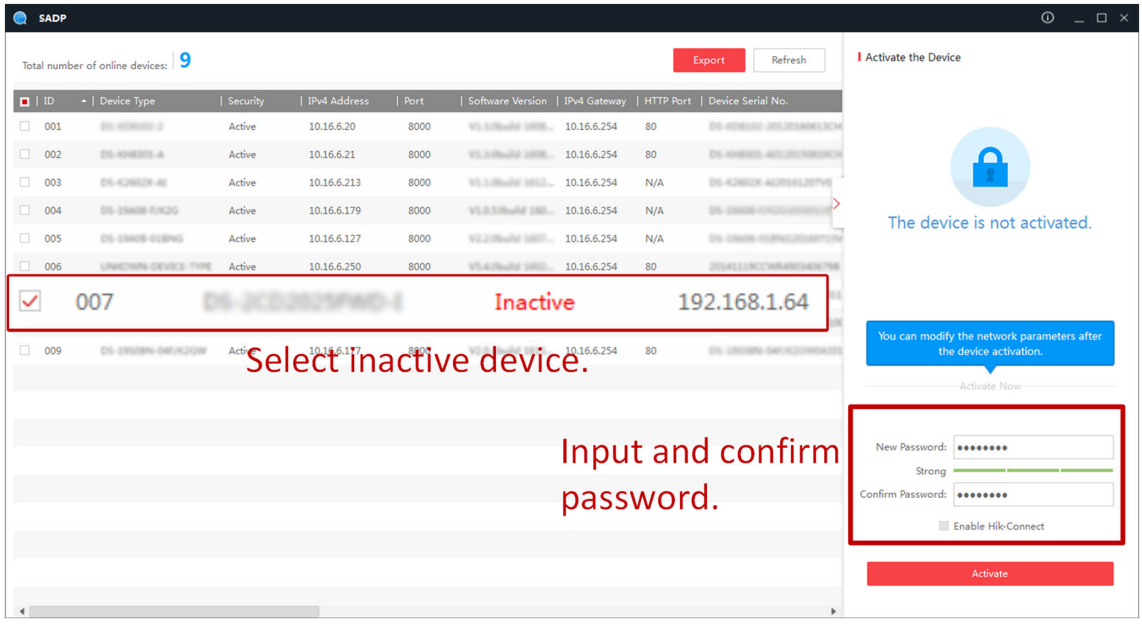

Figure 1-1 Activate via SADP

Status of the device becomes **Active** after successful activation.

5. Modify IP address of the device.
   1) Select the device.
   2) Change the device IP address to the same network segment as your computer by either modifying the IP address manually or checking **Enable DHCP**.
   3) Enter the admin password and click **Modify** to activate your IP address modification.

1.1.3 Activate via Web Browser

Use web browser to activate the device. For the device with the DHCP enabled by default, use SADP software or client software to activate the device.

Before You Start

Ensure the device and the computer connect to the same LAN.

Steps

1. Change the IP address of your computer to the same network segment as the device.
2. Open the web browser, and enter the default IP address of the device to enter the activation interface.
3. Create and confirm the admin password.

Caution

STRONG PASSWORD RECOMMENDED-We highly recommend you create a strong password of your own choosing (using a minimum of 8 characters, including upper case letters, lower case letters, numbers, and special characters) in order to increase the security of your product. And we recommend you reset your password regularly, especially in the high security system, resetting the password monthly or weekly can better protect your product.

4. Click **OK** to complete activation.
5. Go to the network settings interface to modify IP address of the device.

1.2 Login

You can log in to the device via web browser for further operations such as live view and local configuration.

Before You Start

Connect the device to the network directly, or via a switch or a router.

Steps

1. Open the web browser, and enter the IP address of the device to enter the login interface.

Figure 1-2 Login

2. **Optional:** Select the other languages from the drop-down list on the upper right corner of the interface to switch the language.
3. Enter **User Name** and **Password**.
4. Click **Login**.

Note

- If live view failed, click on the upper right corner of the interface to download the plug-in and install it.
- Close the web browser to install the plug-in, or the installation may fail. If you still cannot realize live view after installing the plug-in, try to uninstall the plug-in and reinstall.

5. Reopen the web browser after the installation of the plugin and repeat steps 1 to 3 to log in.
6. **Optional:** Click on the upper right corner of the interface to log out of the device.

1.3 Download Plug-in

No plug-in mode is enabled by default. In no plug-in mode, the resolution of the live view image will be decreased and the live view may not be smooth. You can download and install plug-in to improve the live view condition.

In no-plug in mode, "No Plug-in Mode" prompt will appear on the upper right corner of the interface. You can click to download the plug-in. Close the browser to install the plug-in to the computer. Then access to the IP address of the device again, and the "No Plug-in Mode" prompt will disappear from the upper right corner of the interface.

Figure 1-3 Download Plug-in

Chapter 2 Network Configuration

2.1 Set IP Address

IP address must be properly configured before you operate the device over network. IPv4 and IPv6 are both supported. Both versions can be configured simultaneously without conflicting to each other.

Go to **Configuration → Network → Network Parameters → Network Interface** . Set the parameters and click **Save**.

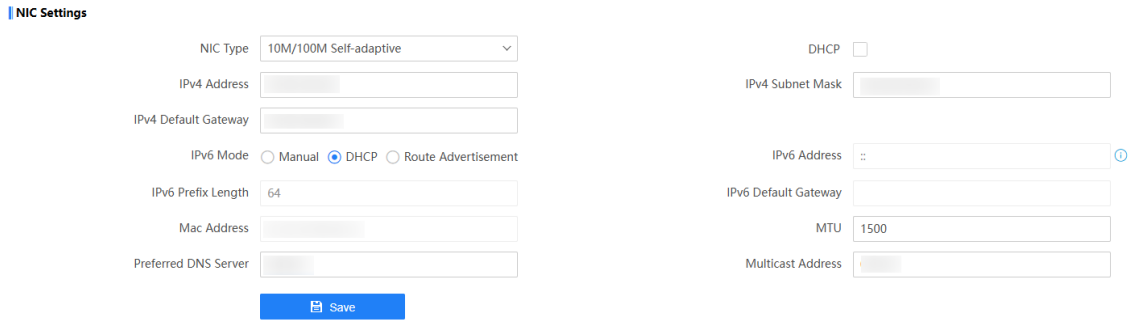

Figure 2-1 Set IP Address

NIC Type

Select a NIC (Network Interface Card) type according to your network condition.

IPv4

Two modes are available.

DHCP

The device automatically gets the IP parameters from the network if you check **DHCP**. The device IP address is changed after enabling the function. You can use SADP to get the device IP address.

Note

The network that the device is connected to should support DHCP (Dynamic Host Configuration Protocol).

Manual

You can set the device IP parameters manually. Enter **IPv4 Address**, **IPv4 Subnet Mask**, and **IPv4 Default Gateway**.

IPv6

Three IPv6 modes are available.

Route Advertisement

The IPv6 address is generated by combining the route advertisement and the device Mac address.

Note

Route advertisement mode requires the support from the router that the device is connected to.

DHCP

The IPv6 address is assigned by the server, router, or gateway.

Manual

Enter **IPv6 Address**, **IPv6 Prefix Length**, and **IPv6 Default Gateway**. Consult the network administrator for required information.

MTU

It stands for maximum transmission unit. It is the size of the largest protocol data unit that can be communicated in a single network layer transaction.

The valid value range of MTU is 1280 to 1500.

Multicast Address

Multicast is group communication where data transmission is addressed to a group of destination devices simultaneously. After setting the IP address of the multicast host, you can send the source data efficiently to multiple receivers.

DNS

It stands for domain name server. It is required if you need to visit the device with domain name. And it is also required for some applications (e.g., sending email). Set **Preferred DNS Address** properly if needed.

2.2 Set Port

The device port can be modified when the device cannot access the network due to port conflicts.

Go to **Configuration → Network → Network Parameters → Port** for port settings.

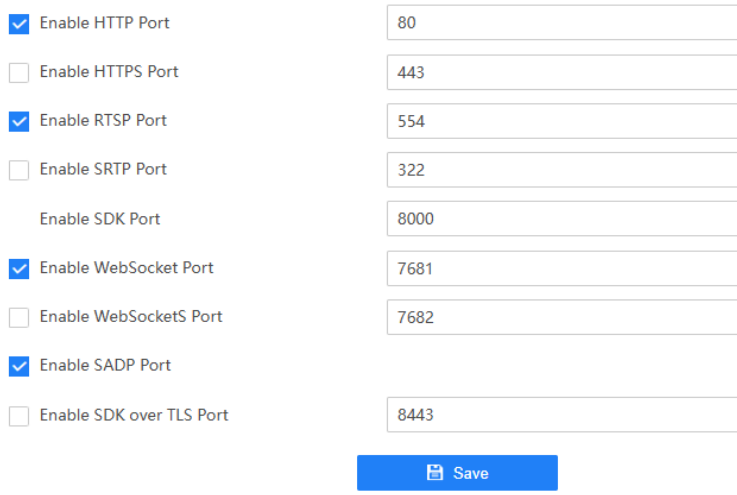

Figure 2-2 Set Port

Enable HTTP Port

It refers to the port through which the browser accesses the device. For example, when the HTTP port is modified to 81, you need to enter ***http://192.168.1.64:81*** in the browser address bar for login.

Enable HTTPS Port

It refers to the port through which the browser accesses the device, but certificate verification is needed.

Enable RTSP Port

RTSP (Real-Time Streaming Protocol) is a communication protocol used to control servers that stream media content over the Internet. It helps in setting up and managing connections between devices for streaming audio or video. RTSP ensures that media players and servers can communicate smoothly, allowing users to play, pause, adjust volume, and perform other actions while streaming content.

Enable SRTP Port

SRTP (Secure Real-Time Transport Protocol) is an extension to RTP (Real-Time Transport Protocol) that incorporates enhanced security features.

Enable SDK Port

It refers to the port through which the client adds the device.

Enable WebSocket Port

It refers to the full-duplex communication protocol port based on TCP. Enable the port for live view without plug-in.

Enable WebSocketS Port

It refers to the full-duplex communication protocol port based on TCP. Enable the port for live view without plug-in. It can only be accessed via certificate verification with high security.

Enable SADP Port

It refers to the port through which the SADP software searches the device.

Enable SDK over TLS Port

It refers to the port that adopts TLS protocol over the SDK service, to provide safer data transmission.

Note

- After editing the port, access to the device via new port.
- Reboot the device to take the new settings into effect.
- The supported ports vary with different models. The actual device prevails.

2.3 Set IEEE 802.1X

IEEE 802.1X is a port-based network access control. It enhances the security level of the LAN/WLAN. When devices connect to the network with IEEE 802.1X standard, the authentication is needed.

Steps

Note

The function varies with different models. The actual device prevails.

1. Go to **Configuration → Network → Network Parameters → 802.1X** .
2. Enable 802.1X.

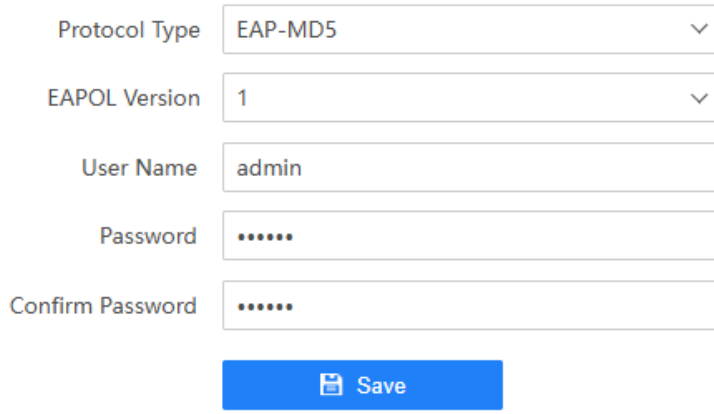

Figure 2-3 Set IEEE 802.1X

3. Select **Protocol Type** and **EAPOL Version**.

   Protocol Type

   The authentication server must be configured. Register a user name and password for 802.1X in the server in advance. Enter the user name and password for authentication.

EAPOL Version

The EAPOL version must be identical with that of the router or the switch.

4. Enter **User Name** and **Password** registered in the server.
5. Confirm the password.
6. Click **Save**.

2.4 Set DDNS

You can use the Dynamic DNS (DDNS) for network access. The dynamic IP address of the device can be mapped to a domain name resolution server to realize the network access via domain name.

Before You Start

- Register the domain name on the DDNS server.
- Set the LAN IP address, subnet mask, gateway, and DNS server parameters. Refer to ***Set IP Address*** for details.
- Complete port mapping. The default ports are 80, 8000, and 554.

Steps

1. Go to **Configuration → Network → Network Parameters → DDNS** .
2. Enable DDNS.

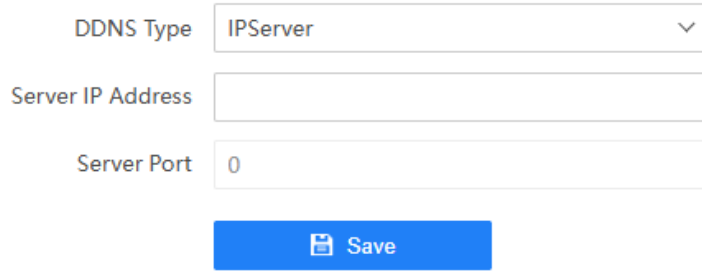

Figure 2-4 Set DDNS

3. Enter the server address and other information.

Note

You can select **IPServer**, **DynDNS**, and **NO-IP** for the DDNS type.

4. Click **Save**.
5. Access the device.

By Browsers	Enter the domain name in the browser address bar to access the device.
By Client Software	Add domain name to the client software. Refer to the client software manual for specific adding methods.

2.5 Set mDNS

If multiple devices of the same type are deployed in the same LAN, you can enable mDNS and set a domain name with the environment identification. Then you can access to the devices quickly via the domain name instead of accessing via the specific IP addresses.

Before You Start
Ensure all the devices of the same type are in the same LAN.

Steps
1. Go to **Configuration → Network → Network Parameters → mDNS** .
2. Enable mDNS.

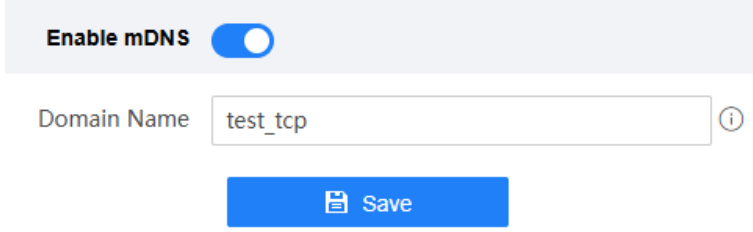

Figure 2-5 Set mDNS

3. Enter **Domain Name**.

Note
The domain name should start with a letter or digit and end with a letter. Only special characters "-_." are allowed. The length cannot exceed 63 bytes.

For example, you can enter "test_tcp".
4. Click **Save**.

What to do next
After setting the domain name, add ".local" suffix to access the device. For example, if the domain name is set as "test_tcp", you need to enter "test_tcp.local" to access to the device. If the domain name contains "." to form multi-level domain name, you should create a DNS server in addition to take the settings into effect.

2.6 Set SNMP

You can set the SNMP network management protocol to get the alarm event and exception messages in network transmission.

Before You Start
Download the SNMP software and manage to receive the device information via SNMP port.

Steps

1. Go to **Configuration → Network → Network Parameters → SNMP** .

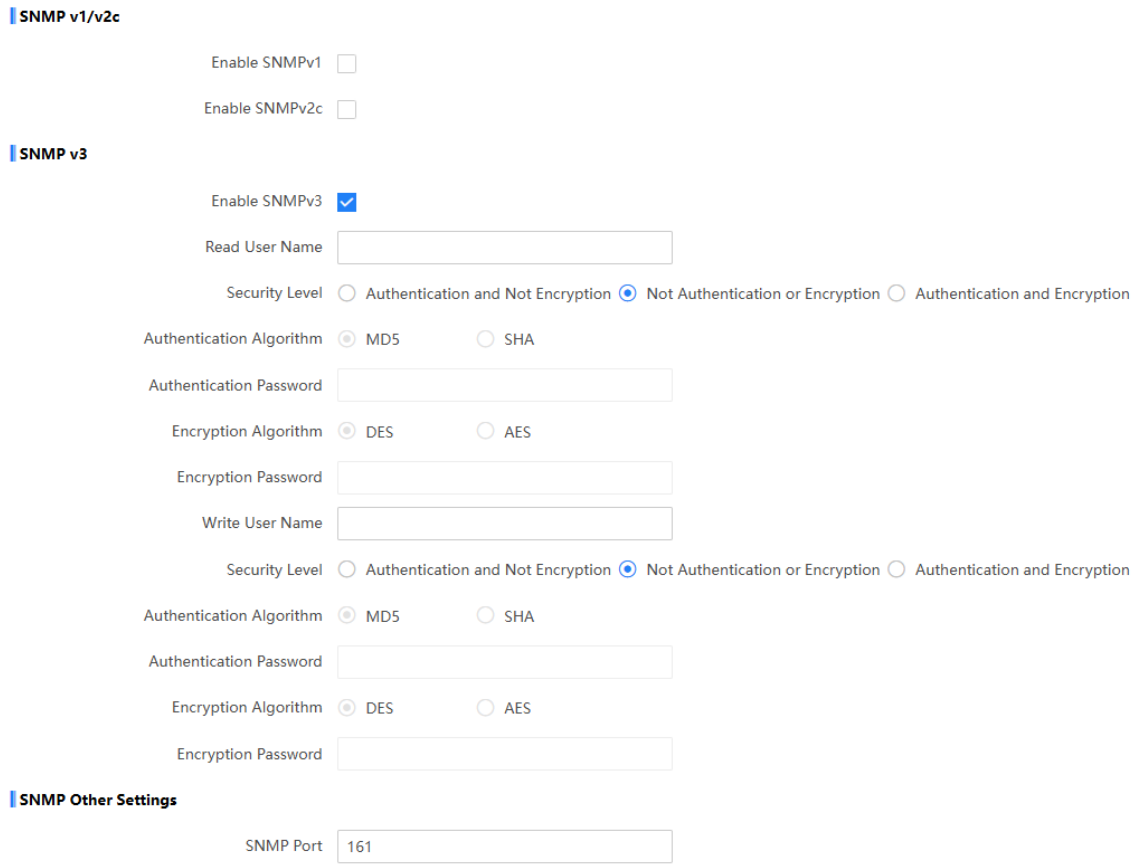

Figure 2-6 Set SNMP

2. Check **Enable SNMPv1/Enable SNMP v2c/Enable SNMPv3**.

Note

- The SNMP version you select should be the same as that of the SNMP software.
- Use different versions according to the security levels required. There exists information leakage using SNMP v1 or v2. You're recommended to use SNMP v3, which provides encryption and is safer. If you use v3, HTTPS protocol must be enabled.

3. Set the SNMP parameters.

Note

For SNMP v3, you need to set **Authentication Algorithm** and **Authentication Password**, and **Encryption Algorithm** and **Encryption Password**.

4. Click **Save**.

2.7 Set QoS

QoS (Quality of Service) can help improve the network delay and network congestion by setting the priority of data sending.

Note

QoS needs support from network devices such as routers and switches.

Steps

1. Go to **Configuration → Network → Network Parameters → QoS** .
2. Enable DSCP according to the actual needs and set the value.

   Note

   Network can identify the priority of data transmission. The bigger the DSCP value is, the higher the priority is. Same settings need to be set in the router for configuration.
3. Click **Save**.

2.8 Connect to Platform

2.8.1 Set Arm Host

The device can upload the captured pictures via the arm host.

Steps

1. Go to **Configuration → Network → Data Connection → Arm Upload** .
2. Go to **Configuration → Network → Data Connection → Cloud Storage** to set the cloud storage parameters. Refer to ***Set Cloud Storage*** for details.
3. Click **Save**.

2.8.2 Set SDK Listening

The SDK listening can be used to receive the uploaded information and pictures of the device arming alarm.

Before You Start

The listening service has been enabled for the SDK listening, and the network communication with the device is normal.

Steps

1. Go to **Configuration → Network → Data Connection → SDK Listening** .
2. Enable SDK listening.

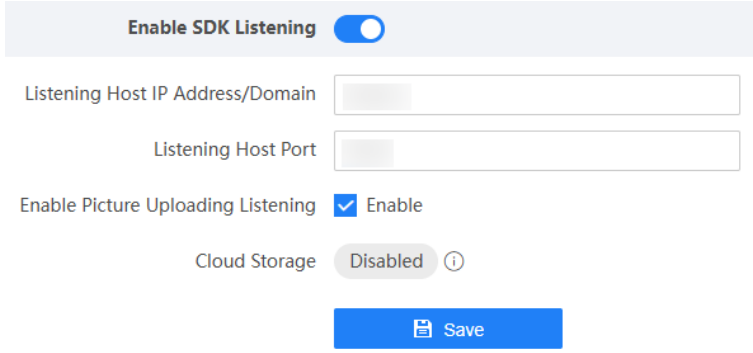

Figure 2-7 Set SDK Listening

3. Set **Listening Host IP Address/Domain** and **Listening Host Port** if you need to upload the alarm information and pictures.
4. **Optional:** Enable the picture uploading listening if you need to upload picture information.
5. **Optional:** If you want to save the alarm information and pictures to the cloud storage, go to **Configuration → Network → Data Connection → Cloud Storage** to set the cloud storage parameters. Refer to ***Set Cloud Storage*** for details.
6. Click **Save**.

2.8.3 Set FTP

Set FTP parameters if you want to upload the captured pictures to the FTP server.

Before You Start

Set the FTP server, and ensure the device can communicate normally with the server.

Steps

1. Go to **Configuration → Network → Data Connection → FTP** .
2. Enable the FTP server.

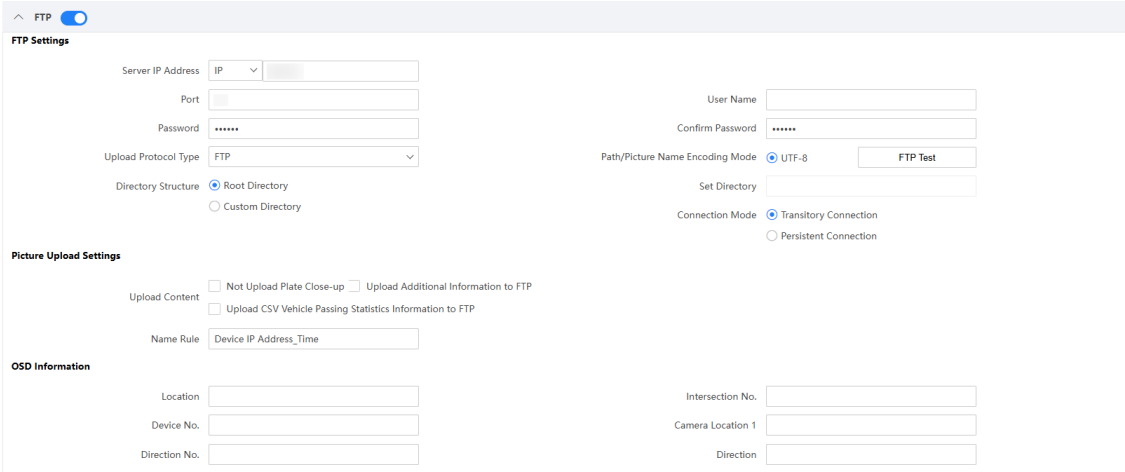

Figure 2-8 Set FTP

3. Set FTP Parameters.

1) Select **Sever IP Address** type and enter corresponding information.
2) Enter **Port**.
3) Enter **User Name** and **Password**, and confirm the password.
4) Select **Upload Protocol Type**.

Note

If you select **SFTP**, the files will be transmitted via encryption mode to guarantee security.

5) Select **Directory Structure**.

Note

You can customize the directory structure according to your needs.

6) Select **Path/Picture Name Encoding Mode**.

UTF-8

UNICODE encoding.

7) Select **Connection Mode**.

Transitory Connection

The connection is temporarily made for one data transmission task. After this task, the connection will be broken.

Persistent Connection

The connection is made for long-term data transmission, which will be broken only when the device is disconnected from the FTP server.

4. Optional: Enable upload functions.

Not Upload Plate Close-up

The close-up pictures of a license plate will not be uploaded.

Upload Additional Information to FTP

Add related information when uploading data to the FTP server.

Upload CSV Vehicle Passing Statistics Information to FTP

Upload the CSV vehicle passing statistics information to the FTP server.

5. **Optional:** Click **FTP Test** to check the FTP server.
6. Click the text filed of **Name Rule** to set the directory and separator for the file storage.
7. **Optional:** Edit **OSD Information** which can be uploaded to the FTP server with the pictures to make it convenient to view and distinguish the data.
8. Click **Save**.

2.8.4 Set ISAPI Listening

ISAPI listening and SDK listening are mutually exclusive protocols. If you enable the picture uploading listening, the device will transmit images via the SDK listening. If not, the device will upload images via ISAPI protocol after the ISAPI parameters are set.

Before You Start

The listening service has been enabled for the ISAPI host, and the network communication with the device is normal.

Steps

1. Go to **Configuration → Network → Data Connection → ISAPI Listening** .
2. Enable **ISAPI1** or **ISAPI2**.

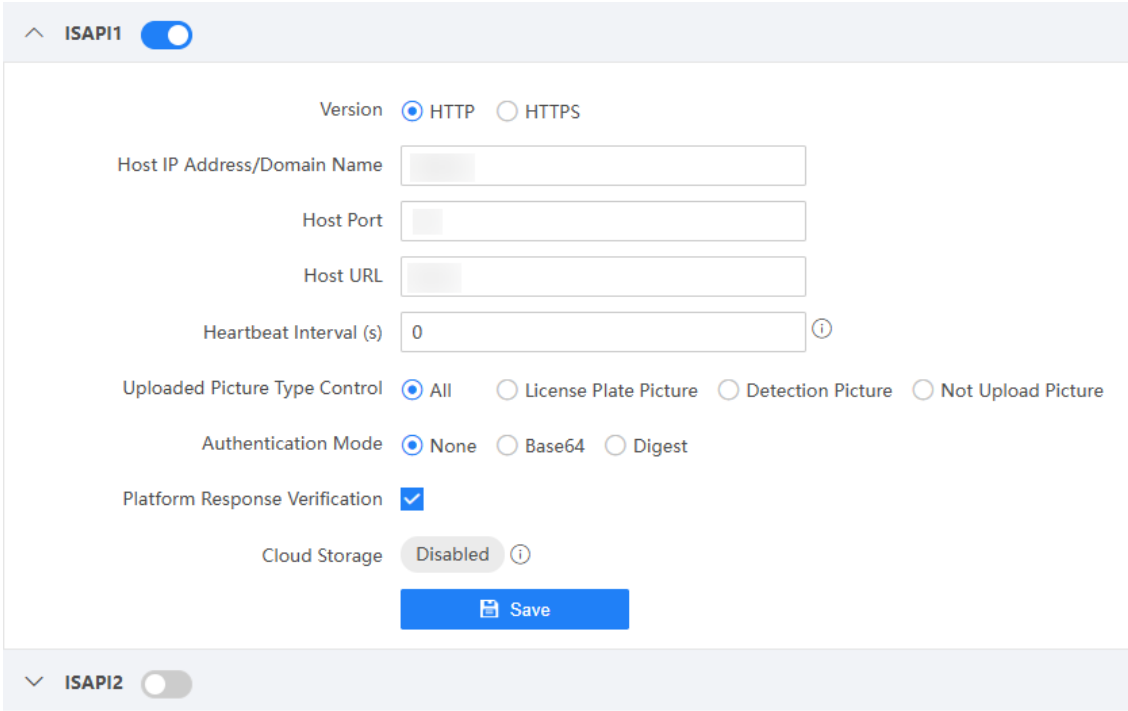

Figure 2-9 Set ISAPI Listening

3. Select **Version**.
4. Set **Host IP Address/Domain Name**, **Host Port**, and **Host URL**.
5. Set the parameters.

   Heartbeat Interval

   If you set it as 0, the heartbeat is disabled.

   Uploaded Picture Type Control

   You can upload license plate pictures and detection pictures (the capture scene pictures), or do not upload pictures.

   Authentication Mode

   Only the authorized users can access the device. If you select **None**, the device will not verify the authentication condition of the access users. It is recommended to select an authentication mode to guarantee the device information security.

   Platform Response Verification

   Enable the function, and the device will get the platform response result.
6. **Optional:** If you want to save the alarm information and pictures to the cloud storage, go to **Configuration → Network → Data Connection → Cloud Storage** to set the cloud storage parameters. Refer to ***Set Cloud Storage*** for details.
7. Click **Save**.

2.8.5 Connect to ISUP Platform

ISUP is a platform access protocol. The device can be remotely accessed via this platform.

Before You Start

- Create the device ID on ISUP platform.
- Ensure the device can communicate with the platform normally.

Steps

1. Go to **Configuration → Network → Data Connection → ISUP** .
2. Enable **ISUP Platform Index**.

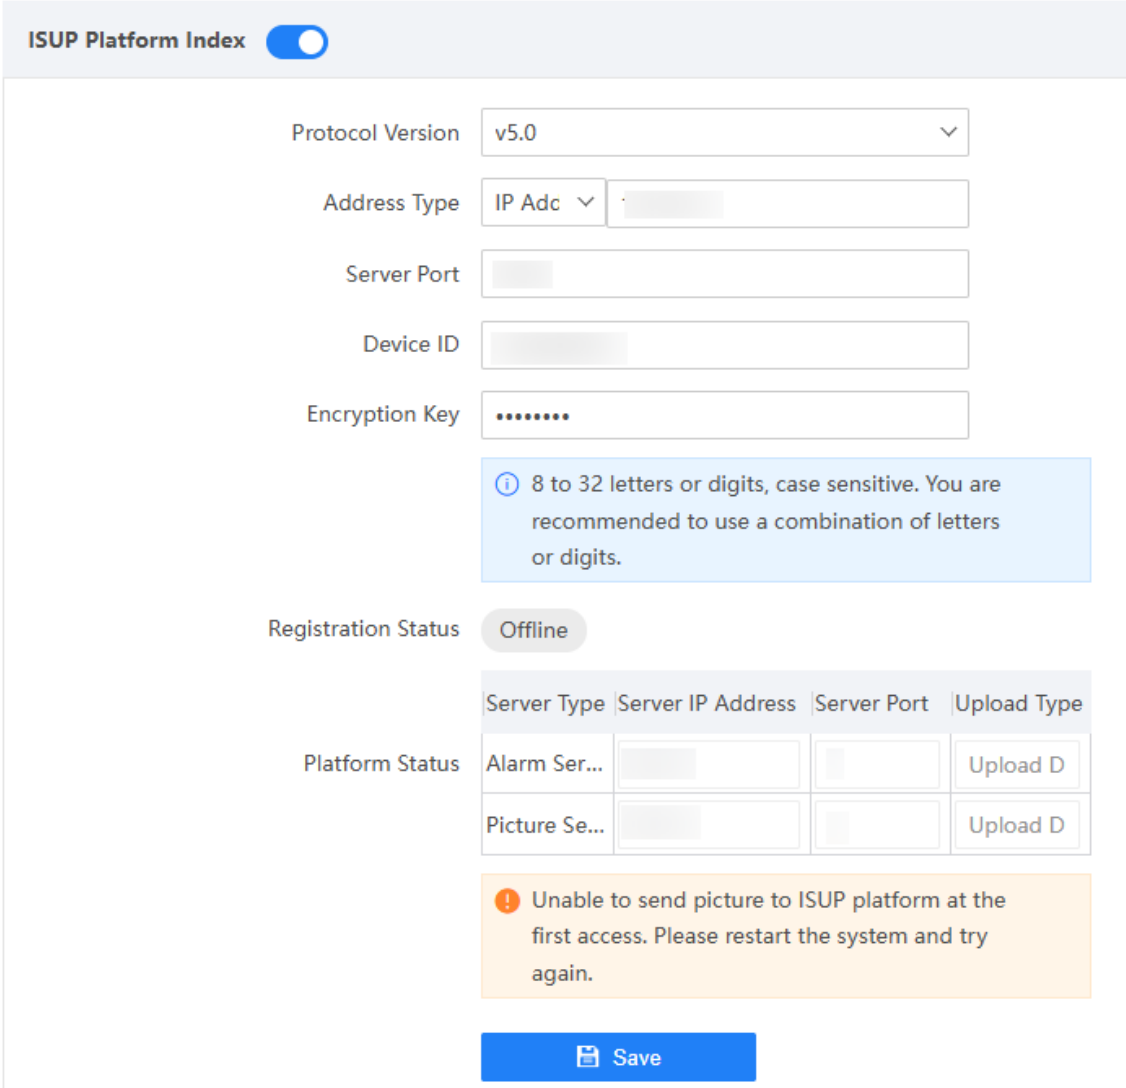

Figure 2-10 Connect to ISUP Platform

3. Select **Protocol Version**.
4. Select **Address Type** and enter IP address or domain name of the platform.
5. Enter **Server Port**, **Device ID**, and **Encryption Key**.

Note

The device ID should be the same with the added one on the platform.

6. Click **Save**.

What to do next

When the registration status shows online, you can add or manage the device via the platform software.

2.8.6 Connect to OTAP

The device can be accessed to the maintenance platform via OTAP protocol, in order to search and acquire device information.

Before You Start

- Set the network parameters including device IP address, gateway, DNS, etc. to get access to the network.
- Disable the other platform accesses conflicting with OTAP.

Steps

1. Go to **Configuration → Network → Data Connection → OTAP** .
2. Select **Platform Access Mode** as **Private Deployment**.
3. Enable **OTAP Server**.

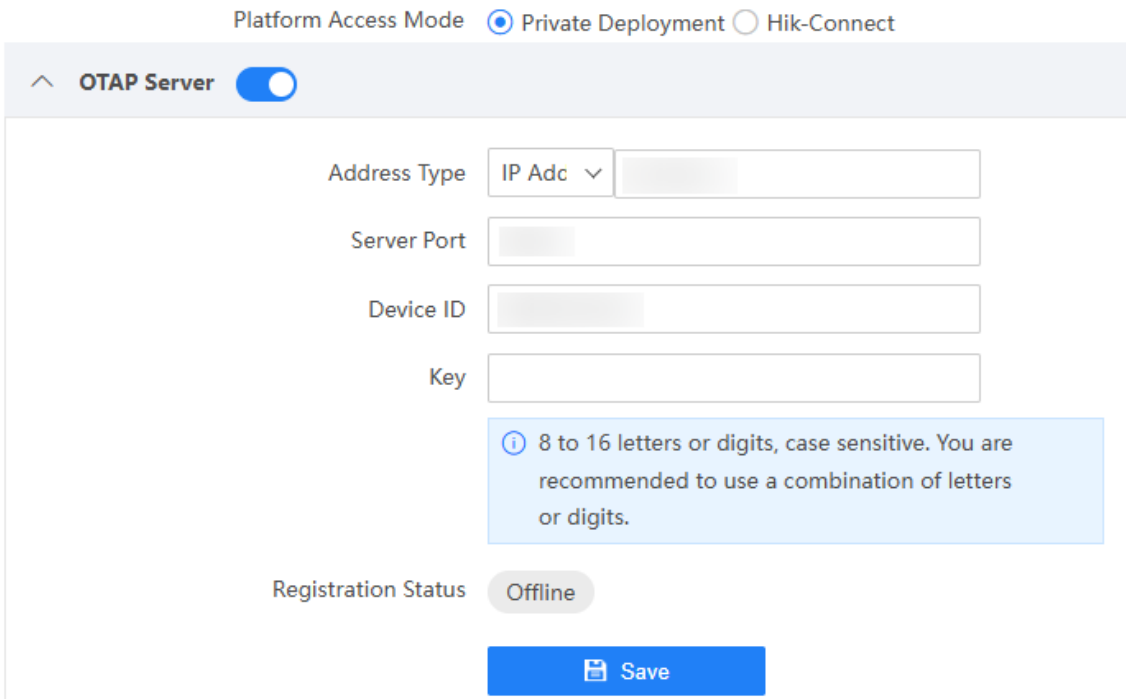

Figure 2-11 Connect to OTAP

4. Set corresponding parameters.

   Address Type

   Select the address type of the connected platform or server, and enter the IP address or domain name.

   Server Port

   The port of the connected platform or server.

   Device ID

The device ID should be the same with the added one on the OTAP platform.

Key

Set a custom key to encrypt the data connection between the device and the platform or server.

5. Click **Save**.

What to do next

When the registration status is online, you can add or manage the device via the platform software.

2.8.7 Connect to Hik-Connect

The device can be remotely accessed via Hik-Connect.

Before You Start

- Set the network parameters including device IP address, gateway, DNS, etc. to get access to the network.
- OTAP connection is disabled.

Steps

1. Enable Hik-Connect in two ways.
   - Get access to Hik-Connect V2.0. Go to **Configuration → Network → Data Connection → OTAP** , and select **Platform Access Mode** as **Hik-Connect**. Enable the function.

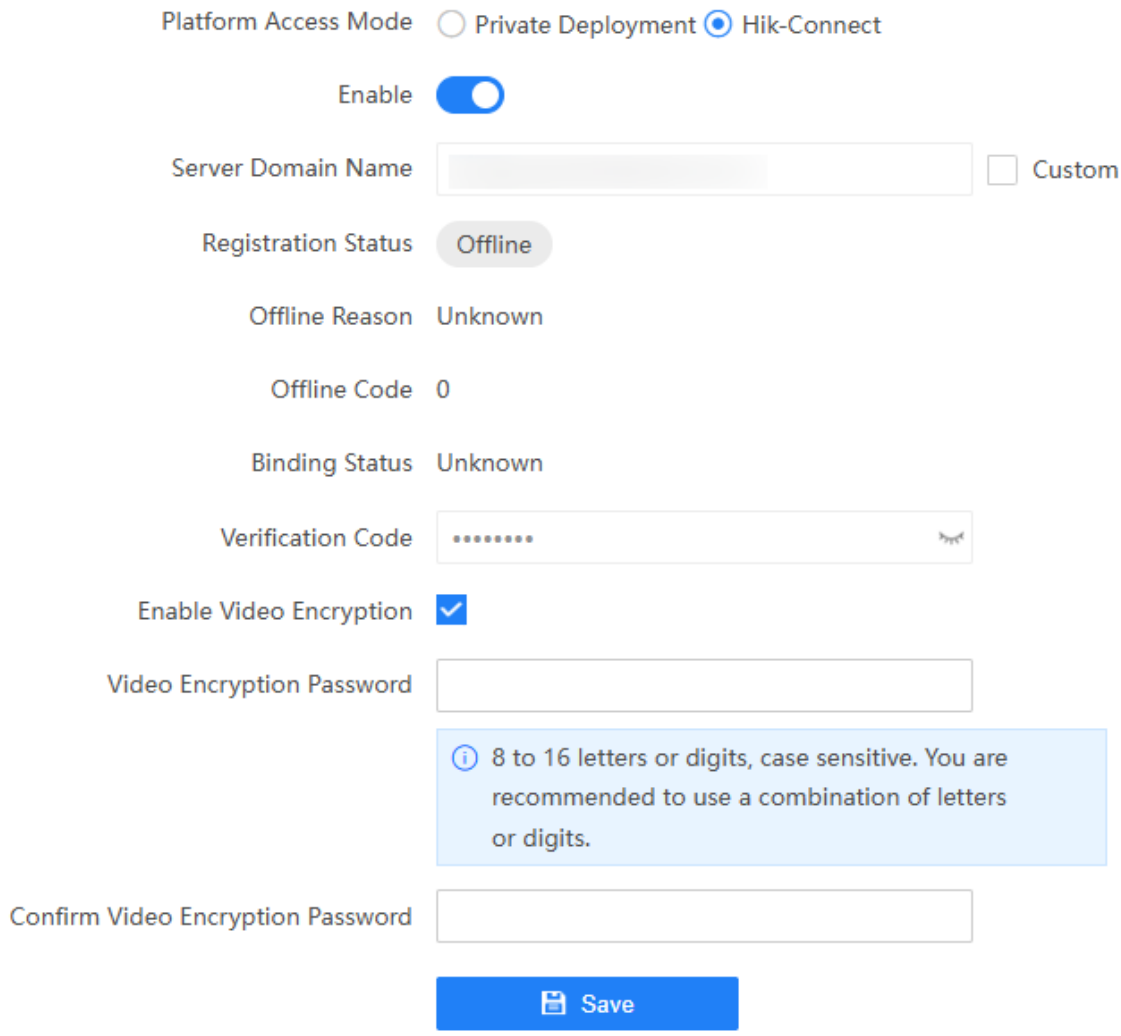

Figure 2-12 Connect to Hik-Connect (V2.0)

- Get access to Hik-Connect V3.0. Go to **Configuration → Network → Data Connection → Hik-Connect Platform** . Enable **Hik-Connect Platform**.

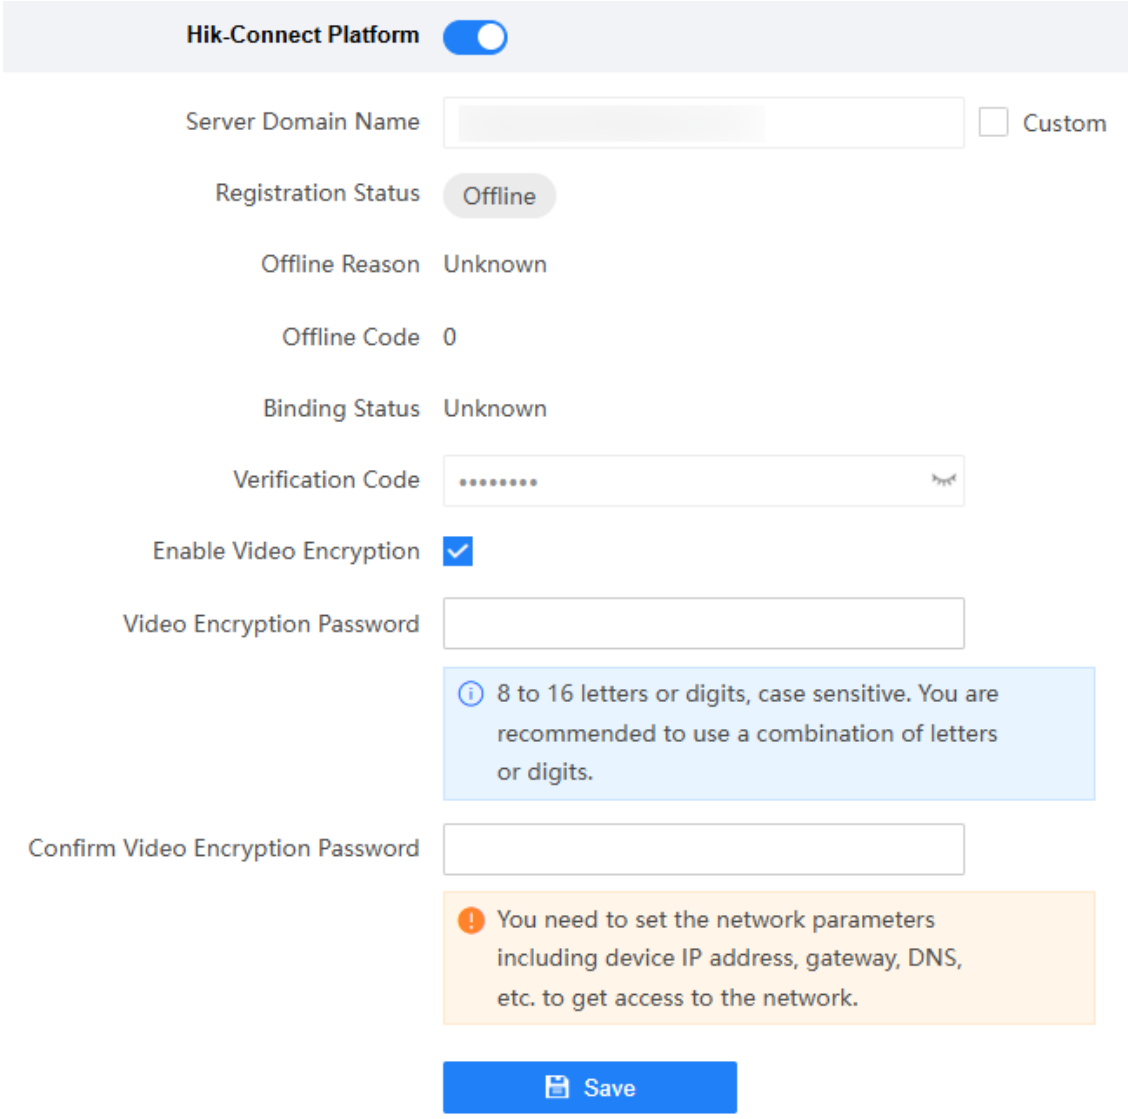

Figure 2-13 Connect to Hik-Connect (V3.0)

2. **Optional:** If you have allocated a custom server, check **Custom** and enter the custom **Server Domain Name**.
3. Enter a custom **Verification Code** used to add the device via **Hik-Connect**.

Caution

The verification code should be 6 letters or digits, case sensitive. You are recommended to use a combination of letters or digits.

4. **Optional:** Check **Enable Video Encryption** and set **Video Encryption Password** to encrypt the videos transmission. Confirm the password.
5. Click **Save**.
6. Add the device to Hik-Connect.

1) Get and install Hik-Connect application by the following ways.
   - Visit ***https://appstore.hikvision.com*** to download the application according to your mobile phone system.
   - Visit the official site of our company. Then go to **Support → Tools → Installation & Maintenance Tools → Hikvision APP Store** .
   - Scan the QR code below to download the application.

Figure 2-14 Hik-Connect

Note

If errors like "Unknown app" occur during the installation, solve the problem in two ways.
- Visit ***https://appstore.hikvision.com/static/help/index.html*** to refer to the troubleshooting.
- Visit ***https://appstore.hikvision.com/*** , and click **Installation Help** at the upper right corner of the interface to refer to the troubleshooting.

2) Start the application and register a user account to log in.
3) Add device by the serial No. on the device body and the verification code.

Note

Refer to the user manual of Hik-Connect application for details.

2.8.8 Set Integration Protocol

You can connect the device via ONVIF protocol.

Steps

1. Go to **Configuration → Network → Data Connection → Integration Protocol** .
2. Enable **ONVIF**.
3. Select **Authentication Mode**, and click **Save**.
4. Add a user.
   1) Click **Add**.
   2) Set user name, password, and user type, and confirm the password.
   3) Click **OK**.
   4) **Optional:** You can select the added user and click ✎ to edit the user information, or click 🗑 to delete the user.

Result

Only the added users can access the device via ONVIF protocol.

2.8.9 Set Cloud Storage

Cloud storage is a kind of network storage. It can be used as the extended storage to save the captured pictures.

Before You Start

- Arrange the cloud storage server.
- You have enabled listening or arming.

Steps

1. Go to **Configuration → Network → Data Connection → Cloud Storage** .
2. Enable **Cloud Storage**.

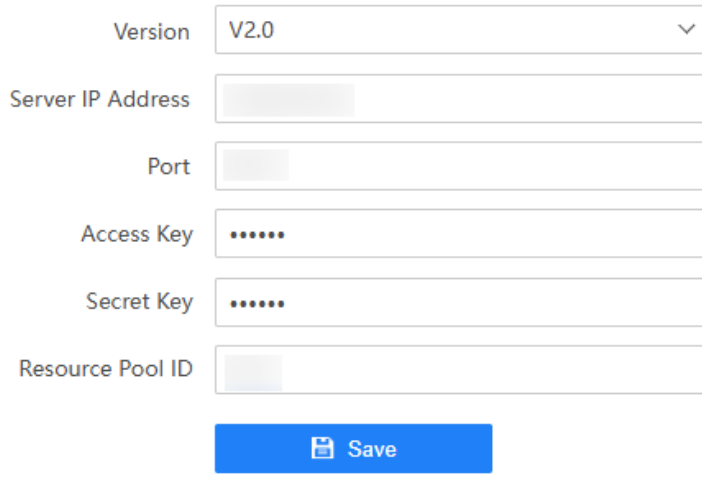

Figure 2-15 Set Cloud Storage

3. Select **Version**.

V1.0
a. Enter **Server IP Address** and **Port**
b. Enter **User Name** and **Password**.
c. Enter **Cloud Storage ID** according to the server storage area No.

V2.0
a. Enter **Server IP Address** and **Port**
b. Enter **Access Key** and **Secret Key**.
c. Enter **Resource Pool ID** according to the server storage area No. of uploading pictures.

4. Click **Save**.

Chapter 3 Quick Configuration

3.1 Set Basic Parameters

You can set the basic parameters in quick configuration to realize capture quickly.

Steps

Note

The interfaces and supported parameters may vary with different models. The actual interface prevails.

1. Go to **Quick Configuration → Basic Parameters** .

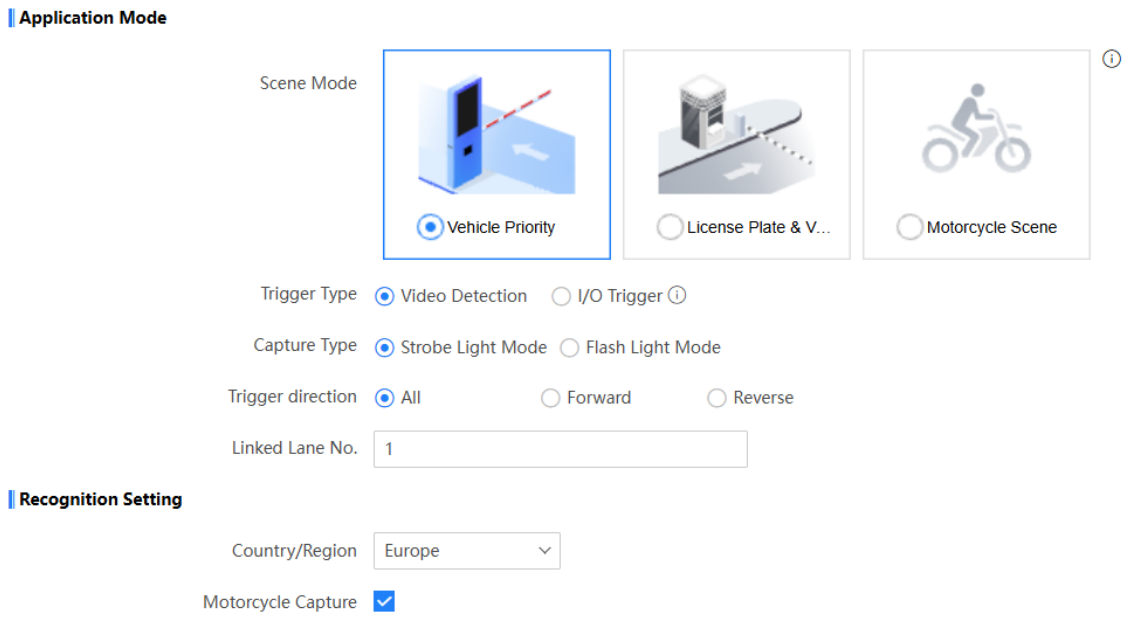

Figure 3-1 Set Basic Parameters (Vehicle Priority)

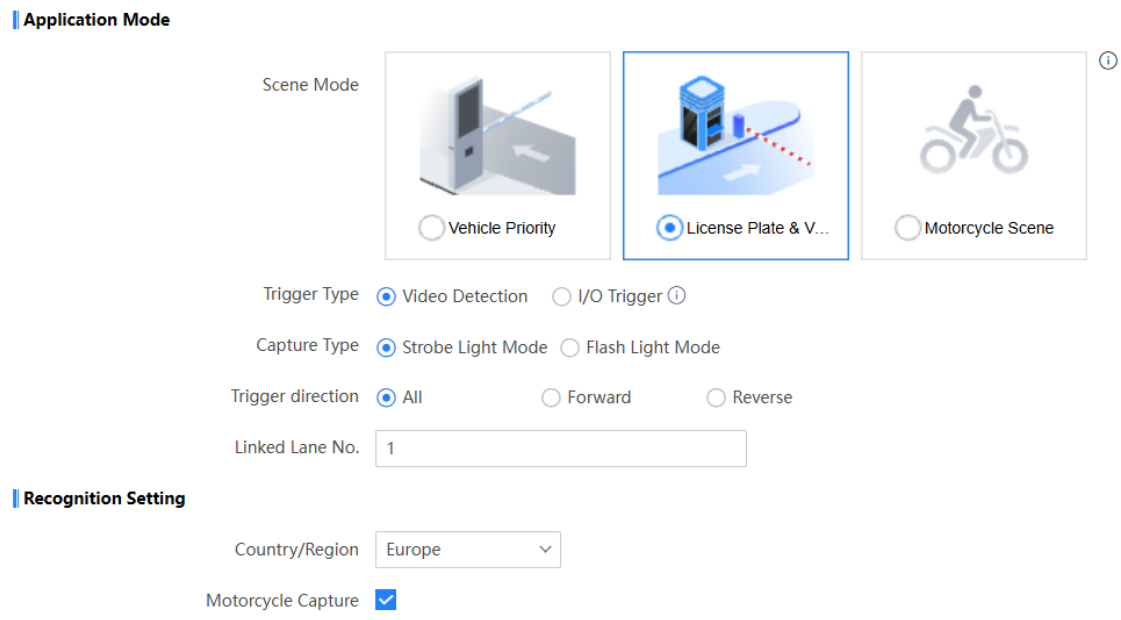

Figure 3-2 Set Basic Parameters (License Plate & Vehicle)

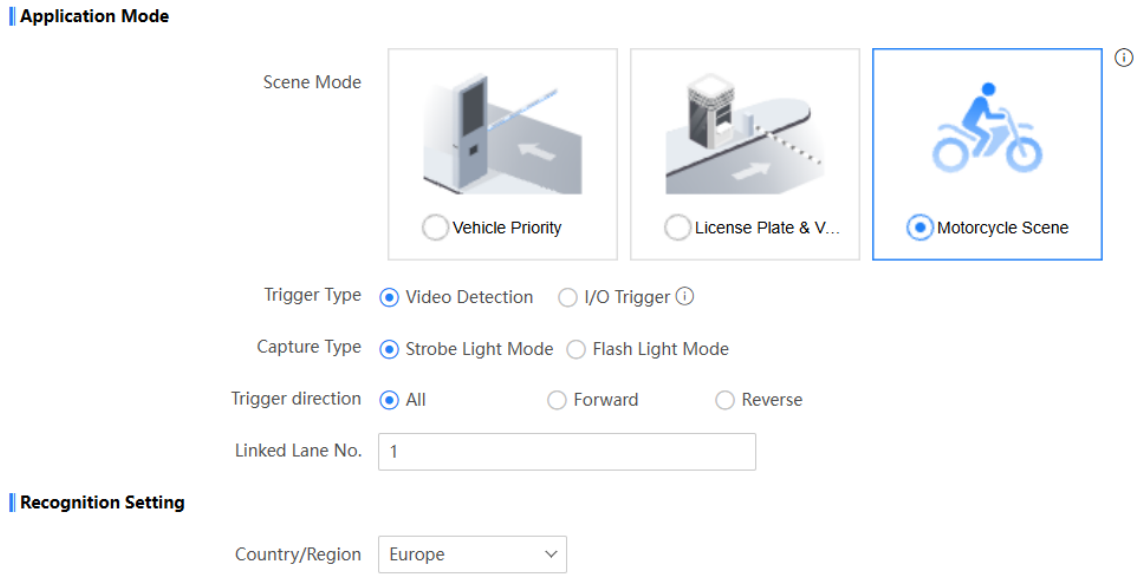

Figure 3-3 Set Basic Parameters (Motorcycle Scene)

2. Set **Application Mode** parameters.

Scene Mode

Select the scene mode according to the actual scene.

- **Vehicle Priority**: The device installation height is 1.5 m with the available capture distance of 3 to 5 m.
- **License Plate & Vehicle**: The device installation height is 0.6 m with the available capture distance of 2 to 4 m.
- **Motorcycle Scene**: The device installation height is 1 to 1.5 m with the available capture distance of 1.5 m. The rear license plate of the motorcycle will be captured.

Trigger Type

Video Detection

Select it to trigger capture by video stream detection.

I/O Trigger

Select it to trigger capture by external device such as the vehicle detector and radar.

Capture Type

Strobe Light Mode adopts the frame extracting, and the captured pictures share the same exposure parameters with the video image. **Flash Light Mode** adopts the separate exposure, and is applicable to the condition of viewing license plate pictures clearly at night.

Trigger Direction

The parameter is available when you select **Trigger Type** as **Video Detection**.

- Select **Forward** when license plates of vehicles from the approaching direction need to be recognized.
- Select **Reverse** when license plates of vehicles from the leaving direction need to be recognized.
- Select **All** when license plates of vehicles from both the approaching direction and the leaving direction need to be recognized.

Linked I/O No.

The parameter is available when you select **Trigger Type** as **I/O Trigger**. It refers to the I/O No. linked under I/O trigger mode. When the coil detects that there is a vehicle passing, a rising or falling edge signal is sent to the linked I/O of the device to trigger capture.

Linked Lane No.

The targets on the linked lane will be captured.

3. Select recognition parameters. Refer to ***Set License Plate Recognition Parameters*** for details.

Note

Enable **Motorcycle Capture** to enable non-motor vehicle capture. **Motorcycle Capture** is only available in **Video Priority** and **License Plate & Vehicle** scenes.

4. Click **Next** to draw lane lines.

3.2 Draw Lane Lines

You can set video parameters, supplement light parameters, and draw trigger line and recognition area.

Steps

1. Go to **Quick Configuration → Draw Lane Line** .

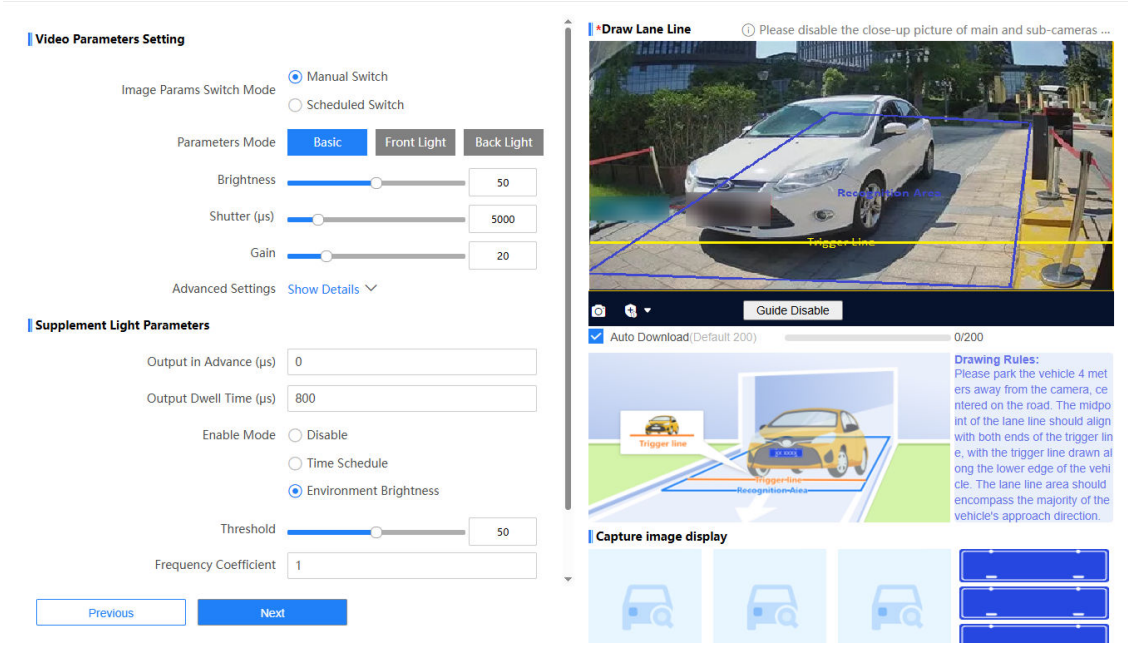

Figure 3-4 Draw Lane Lines

2. Set video parameters. Refer to ***Set Camera Parameters*** for details.
3. Set supplement light parameters. Refer to ***Set Supplement Light Parameters*** for details.
4. Adjust the trigger line and recognition area on the live view image.

Note

For the device with vari-focal lens, disable the close-up picture of main and sub-cameras before adjusting the trigger line and recognition area.

1) Click under the live view image to adjust the image clearly.
2) Refer to the drawing guide below the live view image on the interface.
3) Select the default trigger line and recognition area on the live view image. Adjust the positions and shapes according to the actual scene.

5. **Optional:** You can click the icons under the live view image to do corresponding operations.

Table 3-1 Icon Description

Icon	Description
	Click it to capture a picture, and the captured picture and recognized license plate picture will be displayed on the interface below the drawing guide.
/ /	• **Level 1 Arming**: Only the current computer can arm the device and receive the captured pictures in real time. The pictures will not be stored in the storage card. The pictures in the storage card will be uploaded to the level 1 arming terminal. • **Level 2 Arming**: Up to 3 computers can arm the device and receive the captured pictures in real time. The pictures will be uploaded to level 2 arming terminal, and stored in the storage card. • **Disarming**: Disable the real-time capture function.
Auto Download	In no plug-in mode, you can enable **Auto Download** to download the captured pictures to the computer directly. The latest captured pictures will be downloaded and compressed as a file in the format of .zip automatically. The max. number of pictures in one compressed file depends on the selected **Number of Auto Captured Pictures** in **Configuration → Local** in no plug-in mode. If you disarm, the auto downloading will stop. You can view the downloading progress on the interface. The auto downloaded files will be saved to the default downloading directory of the browser in the format of .zip. You can go to the directory, decompress the file, and view the captured pictures. If you disable **Auto Download**, when you disarm, the dialogue box will pop up to prompt you if you need to download the arming captures. Click **OK** and the latest captured pictures will be downloaded and compressed as a file in the format of .zip automatically.

Note

The supported icons vary with different models. The actual interface prevails.

6. Click **Next** to set allowlist and blocklist.

3.3 Set Allowlist and Blocklist

Barrier Gate Control

1. Go to **Quick Configuration → Allowlist and Blocklist → Barrier Gate Control** .
2. Select **Control Mode**.

- **By Platform**: Select this mode in the scene in which the entry permissions are controlled by the software.
- **By Camera**: Select this mode in single camera scene (no control software) and allowlist scene in which the camera controls the barrier gate in advance according to the set passing rules in **Configuration → Capture → Entrance and Exit → Pass Control** .

3. If you select **Control Mode** as **By Platform**, you can check **Enable Barrier Gate Control Offline** to control the barrier gate when the device is offline. Select **Barrier Gate Control When Platform Disconnection**. You can select to remain the barrier gate open or control the barrier gate by camera.
4. If you select **Control Mode** as **By Camera**, select the vehicle types to open the barrier gate and pass.

Note

You can refer to ***Control Barrier Gate*** and ***Pass Control*** for details.

Allowlist and Blocklist

You can refer to ***Set Allowlist and Blocklist*** for details.

Chapter 4 Entrance and Exit Configuration

4.1 Set Barrier Gate Linkage

If a barrier gate has been connected to the device, you can link barrier gate to realize the control and management of the vehicles at the entrance or exit.

4.1.1 Set Allowlist and Blocklist

Set allowlist and blocklist if you want to control the passing vehicles at the entrance or exit via the barrier gate.

Before You Start

- Connect the barrier gate to the relay output interface of the device.
- Install the storage card, and ensure the storage status is normal.

Steps

1. Go to **Configuration → Capture → Entrance and Exit → Allowlist and Blocklist** .
2. Add an allowlist or blocklist.
   1) Click **Add**.
   2) Set **Plate No.** and **Card No.**, and select the list type.
   3) **Optional:** If you want to control vehicles during fixed time period, enable **Time Settings**, and set the valid start time and end time.

      Note

      Time settings is only available for the allowlist vehicles.

   4) Click **OK** to save the current settings and exit, or click **Save and Continue** to save the current settings and add other vehicles continuously.

      Note

      Wait for 15 minutes to let the added allowlist or blocklist write into the storage. Do not reboot the device during the process.

   The information of the added vehicles in the allowlist or blocklist will be listed below.

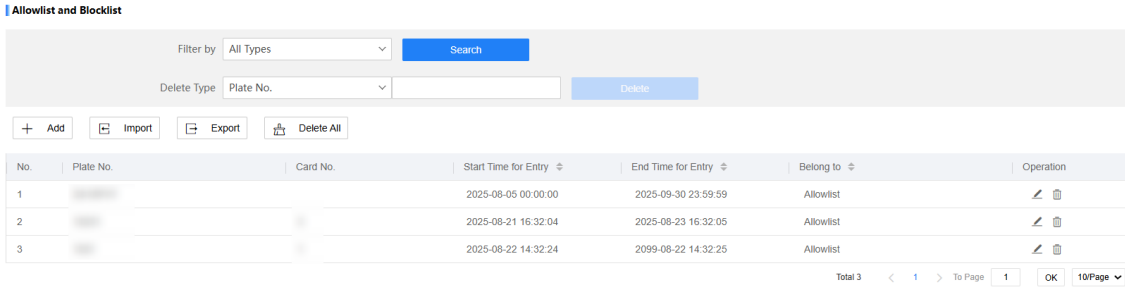

Figure 4-1 Set Allowlist and Blocklist

3. You can search, modify, delete, import, or export the allowlist and blocklist.

Search Select the search type, or enter the keywords. Click **Search**. The searched vehicle information will be listed below.

Modify Select an item from the list, and click . Modify the information, and click **OK**.

Delete
- Select the delete type, or enter the keywords. Click **Delete** to delete the lists of the same type.
- Select an item from the list, and click to delete the item.
- Click **Delete All** to delete all the lists.

Import
a. Click **Import**.
b. Click **Download Template**, and save the template.
c. Open the template, edit the information, and save it.
d. Click **Import** again.
e. Click **Browse** to select the edited template.
f. Click **Import** to import the information to the device.

Export Click **Export**, and the list will be saved to the default downloading directory of the browser in the format of .xls.

4.1.2 Control Barrier Gate

Link the barrier gate to realize the control and management of the vehicles at the entrance or exit.

Steps

1. Go to **Configuration → Capture → Entrance and Exit → Barrier Gate** .

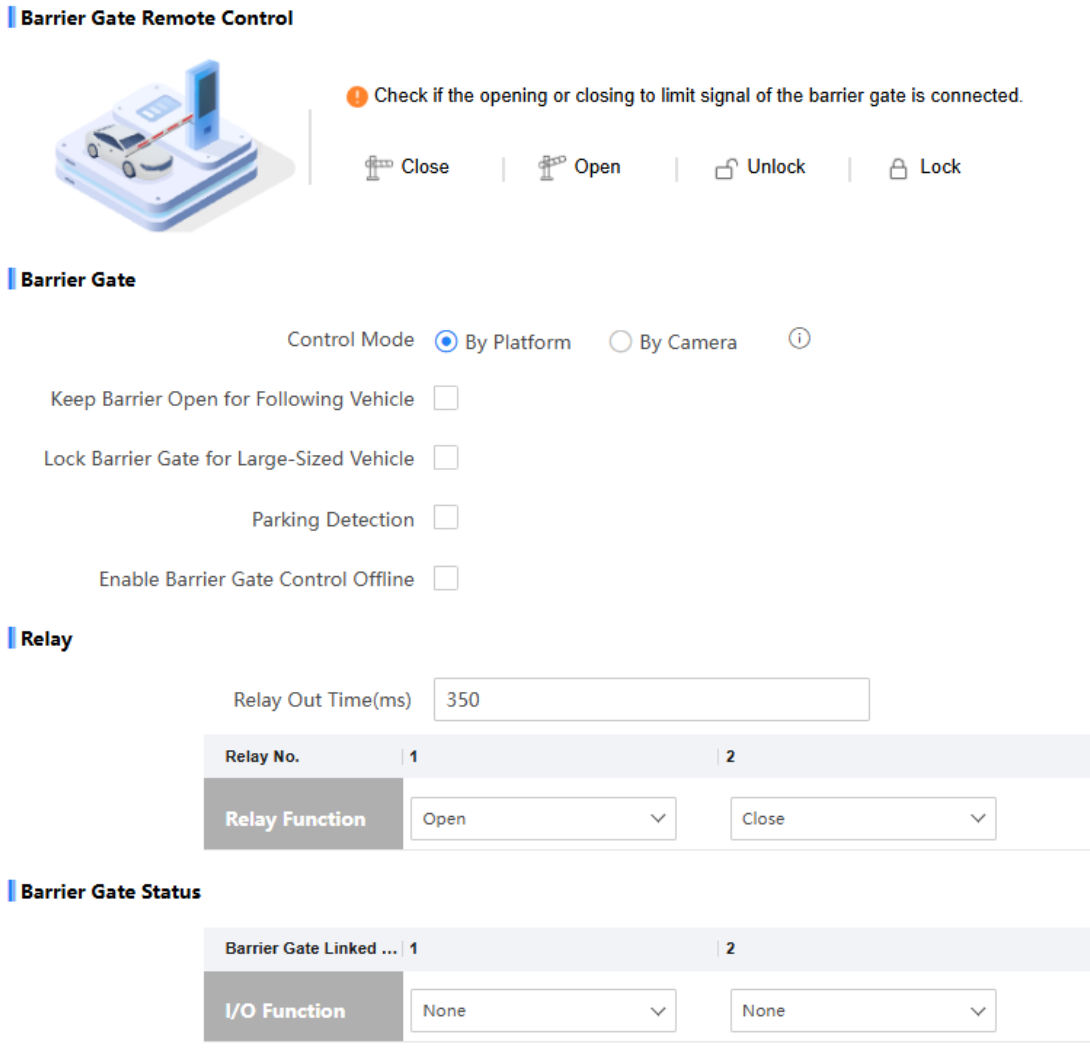

Figure 4-2 Control Barrier Gate

2. Set **Barrier Gate** parameters.

Control Mode

- **By Platform**: Select this mode in the scene in which the entry permissions are controlled by the software.
- **By Camera**: Select this mode in single camera scene (no control software) and allowlist scene in which the camera controls the barrier gate in advance according to the set passing rules in **Pass Control**.

Keep Barrier Open for Following Vehicle

Enable the function to keep the barrier gate open when the device detects following vehicles are passing. The barrier gate will close after the following vehicles pass.

Lock Barrier Gate for Large-Sized Vehicle

Enable the function and set **Lock Duration**. If a large-sized vehicle is passing, the barrier gate will be locked during the set time.

Parking Detection

Enable the function and set **Judging Time**. If a vehicle has been parked for a duration longer than the set judging time, the parking information will be uploaded.

Enable Barrier Gate Control Offline

If you select **Control Mode** as **By Platform**, you can check **Enable Barrier Gate Control Offline** to control the barrier gate when the device is offline. Select **Barrier Gate Control When Platform Disconnection**. You can select to remain the barrier gate open or control the barrier gate by camera when the platform is disconnected.

3. Set **Relay** parameters.

Relay Out Time

Alarms will be output during the set time.

Relay Function

Select the functions of corresponding relays. Relay 1 corresponds to the 1A and 1B of the terminal. Relay 2 corresponds to the 2A and 2B of the terminal.

4. Select **I/O Function** for the corresponding barrier gate related I/O. The device will upload barrier gate status information for convenient entrance and exit management.

Note

- If the device only have one I/O interface, and the trigger type is **I/O Trigger**, the barrier status cannot be configured.
- If the trigger type is **Dual I/O Trigger** and the trigger I/O and logic I/O are selected, the corresponding barrier gate related I/O function cannot be configured. E.g., the trigger I/O is I/O 1 and the logic I/O is I/O 2. Then the barrier gate related I/O 1 and I/O 2 functions cannot be configured.

5. **Optional:** Click **Close**, **Open**, **Unlock**, or **Lock** in **Barrier Gate Remote Control** to control the barrier gate remotely.

Note

- Ensure the opening or closing to limit signal of the barrier gate is connected.
- You can also go to **Live View → Barrier Gate Control** to control the barrier gate remotely.

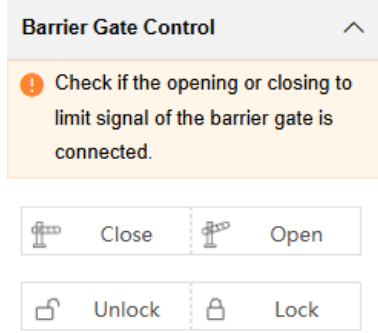

6. Click **Save**.

4.1.3 Pass Control

The camera can control the passing rules of different types of vehicles, and upload alarm information.

Before You Start

- Select the barrier gate control mode as **By Camera**. Refer to ***Control Barrier Gate*** for details.
- Set the allowlist and blocklist. Refer to ***Set Allowlist and Blocklist*** for details.

Steps

1. Go to **Configuration → Capture → Entrance and Exit → Pass Control** .

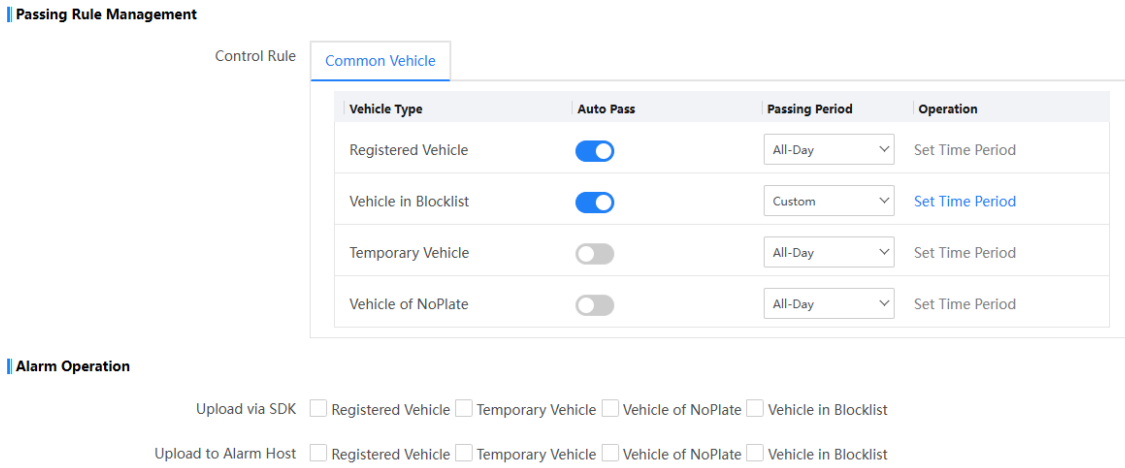

Figure 4-3 Pass Control

2. Set the passing rules for different types of vehicles.
   1) Enable **Auto Pass** or not for vehicles in allowlist, vehicles in blocklist, temporary vehicles, and vehicles of no plates.
   2) Set **Passing Period**.

      All-Day

The corresponding type of vehicles can pass automatically all day.

Custom

The corresponding type of vehicles can pass automatically at the set time period. Click **Set Time Period** to set the auto passing time period of each day. Up to 5 passing periods can be set for each day. The setting method is same with setting capture schedule. Refer to ***Set Capture Schedule*** for details.

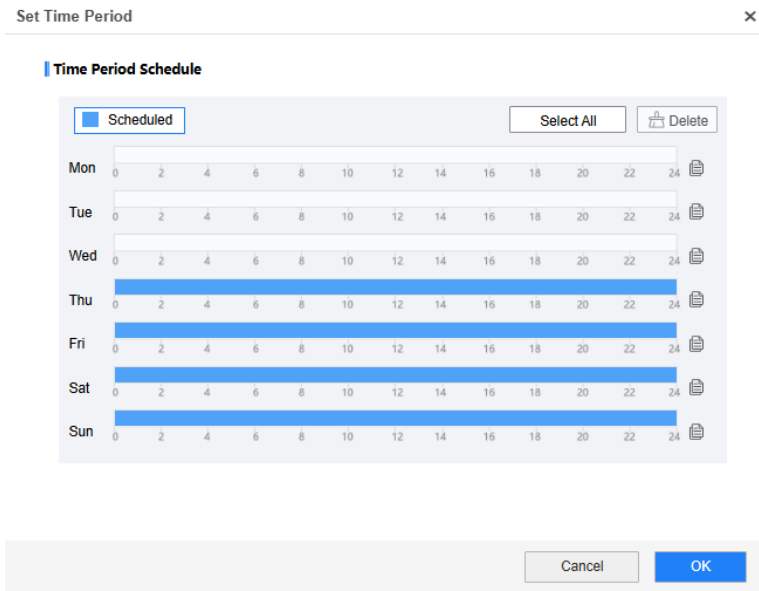

Figure 4-4 Set Custom Auto Passing Time Period

3. Select the vehicle type(s) of which the alarm information will be uploaded via SDK or to alarm host.

   Upload via SDK

   If the device has been connected to the platform, you can arm and upload the vehicle information to the arming terminal via SDK.

   Upload to Alarm Host

   If the device has been connected to the alarm device, when the barrier gate is open, the alarm device will be triggered to alarm.

4. Click **Save**.

4.2 Set Wiegand Parameters

The device can get access to the access control system or other system supporting Wiegand protocols to send data in the entrance and exit scenes.

Steps

Note

The function varies with different models. The actual device prevails.

1. Go to **Configuration → Capture → Entrance and Exit → Wiegand Parameters** .
2. Enable the function.

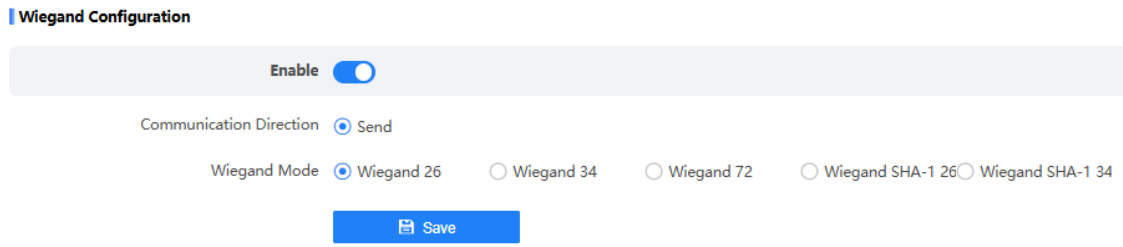

Figure 4-5 Set Wiegand Parameters

3. Select **Communication Direction**.

   Send

   The barrier gate can be connected to the device via Wiegand 26, Wiegand 34, Wiegand 72, or Wiegand sha1 26 protocol.

4. Select **Wiegand Mode**.

   Wiegand 26

   It is applicable to all the access control projects. The device will get the card No. (pure numbers with no more than 8 digits) from the allowlist and blocklist related to the captured license plate number and send the card No. to the access control system or other system supporting Wiegand protocols via Wiegand 26 protocol.

   Wiegand 34

   It is applicable to all the access control projects. The device will get the card No. (pure numbers with no more than 10 digits) from the allowlist and blocklist related to the captured license plate number and send the card No. to the access control system or other system supporting Wiegand protocols via Wiegand 34 protocol.

   Wiegand 72

   It is a non-standard Wiegand protocol. The device will get the card No. (up to 9 characters only including 0 to 9, uppercase, or lowercase can be sent) from the allowlist and blocklist related to the captured license plate number and send the card No. to the access control system or other system supporting Wiegand protocols via Wiegand 72 protocol.

   Wiegand SHA-1 26

   It is a data transmission format integrating Wiegand protocol and SHA-1 hash algorithm. This format increases SHA-1 hash value based on the standard Wiegand 26-bit data frame to raise the data security and integrity.

Wiegand SHA-1 34

It is a data transmission format integrating Wiegand protocol and SHA-1 hash algorithm. This format increases SHA-1 hash value based on the standard Wiegand 34-bit data frame to raise the data security and integrity.

5. **Optional:** If you select Wiegand SHA-1 26 or Wiegand SHA-1 34, you can enable MSB (Most Significant Bit) to verify the format and content of the data frame to raise the system security and stability.
6. Click **Save**.

4.3 Set Custom License Plate Mapping

In some conditions, the recognized license plate number is inconsistent with the actual one. You can add the license plate mapping list to correct the recognized license plate number.

Steps

1. Go to **Configuration → Capture → Entrance and Exit → Mapping List** .
2. Enable **Custom License Plate Mapping**.
3. Add a mapping list.
   1) Click **Add** to add an item.
   2) Enter **Recognized License Plate Number** and **Mapped License Plate Number**.
   3) Click **Save**.

Note

Up to 64 items can be added.

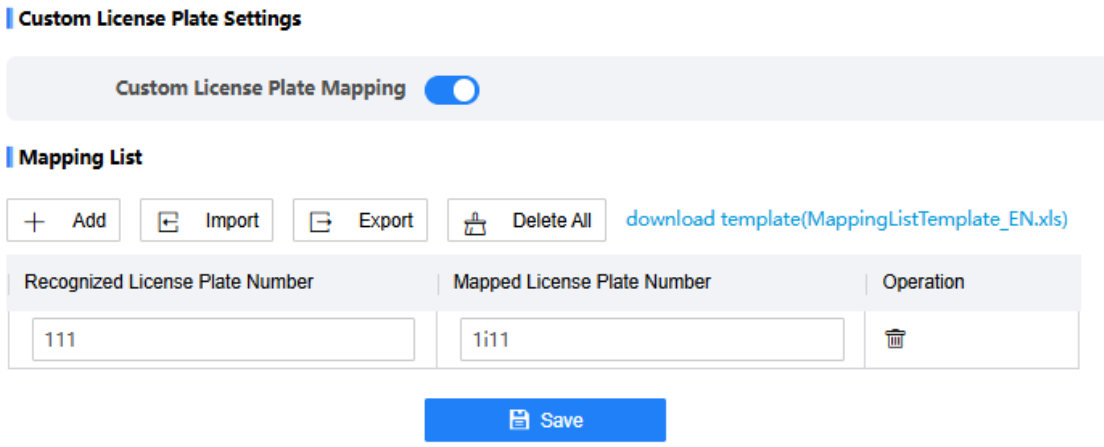

Figure 4-6 Add Mapping List

4. You can import, export, or delete the mapping list.

Delete
- Click 🗑 to delete the item.
- Click **Delete All** to delete all the lists.

Import
a. Click **download template**, and save the template.
b. Open the template, edit the information, and save it.
c. Click **Import**.
d. Select the edited template to import the mapping list in batch.

Export Click **Export**, and the mapping list will be saved to the default downloading directory of the browser in the format of .xls.

4.4 Set Main and Sub-Camera Mode

In entrance and exit scenes, a main camera can be cooperated with a sub-camera to upload the captured pictures of the sub-camera to the connected platform.

Before You Start
Disable the close-up picture capture of the main and sub-cameras before use.

Steps

Note
The function varies with different models. The actual device prevails.

1. Go to **Configuration → Capture → Entrance and Exit → Main and Sub Camera Mode** .
2. Enable the function.

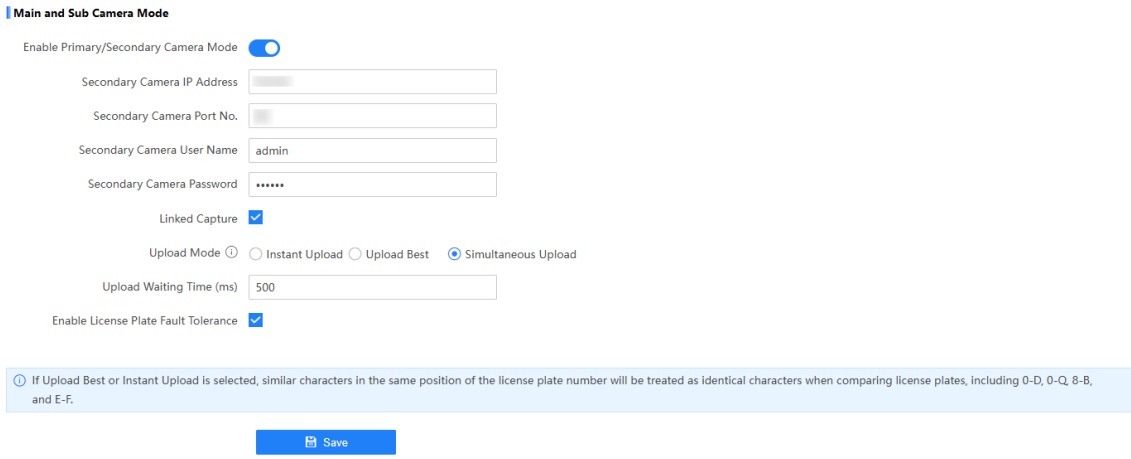

Figure 4-7 Set Main and Sub-Camera Mode

3. Enter the IP address, port No., user name, and password of the sub-camera.
4. Enable **Linked Capture** to enable the sub-camera to capture pictures too.
5. Set other parameters.

Upload Mode

Instant Upload

Upload data immediately after capturing vehicles. The latter captured data will not be uploaded if the main/sub-camera (another camera) captures the same license plate during the upload waiting time. If a different license plate is captured, the data will be uploaded, and the waiting time will be reset.

Upload Best

After a vehicle is captured, if the main/sub-camera (another camera) captures the same license plate, the capture data with higher confidence will be uploaded. If no second capture within the waiting time, the previous data will be uploaded.

Simultaneous Upload

The captured data from the main/sub-camera will be uploaded via the main camera.

Note

If **Upload Best** or **Instant Upload** is selected, similar characters in the same position of the license plate number will be treated as identical characters when comparing license plates, including 0-D, 0-Q, 8-B, and E-F.

Upload Waiting Time

The time interval between two uploads.

Enable License Plate Fault Tolerance

Enable this function to enable fuzzy matching of license plates. The license plate color or state/province will not be matched. Up to 1 character will be matched fuzzily. For example, the license plate of a registered vehicle is 10-85538, but the recognized license plate is 10-85638. If license plate fault tolerance is enabled, the recognize license plate also belongs to the type of registered vehicle.

6. Click **Save**.

Chapter 5 Capture Configuration

5.1 Set Capture Parameters

5.1.1 Set License Plate Recognition Parameters

When there are vehicles of different types passing from different directions, set the license plate recognition parameters.

Steps

1. Go to **Configuration → Capture → Capture Parameters → Recognition Setting → Recognition Setting** .

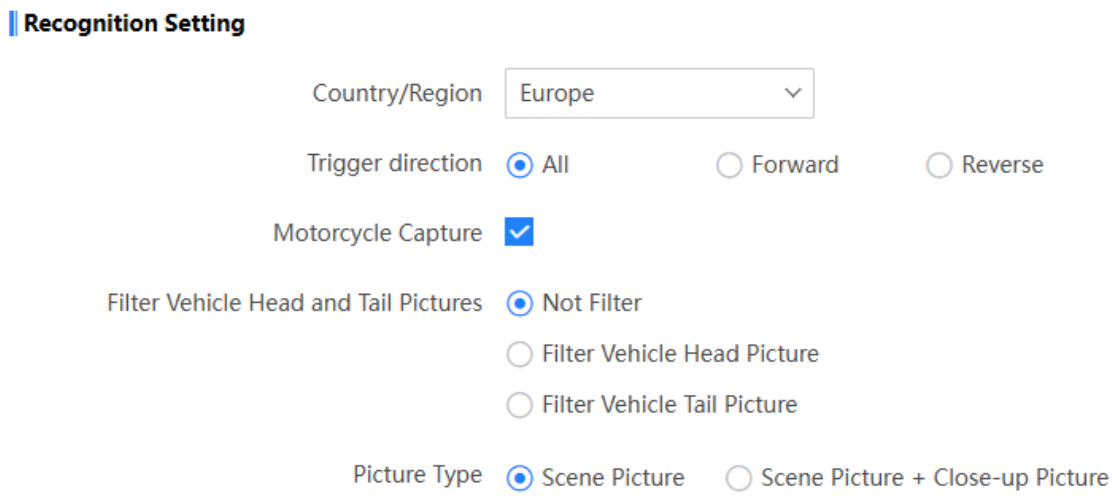

Figure 5-1 Set License Plate Recognition Parameters

2. Set the following parameters.

Country/Region

Select the country/region in which the license plates will be recognized. If you select HongKong (China) or MaCao (China), you can select the region(s) in which the license plates will be recognized. The license plates in the unselected region(s) will not be recognized. You can also click ↑ / ↓ to adjust the recognition order. The license plates in the upper region will be recognized in priority.

Trigger Direction

- Select **Forward** when license plates of vehicles from the approaching direction need to be recognized.
- Select **Reverse** when license plates of vehicles from the leaving direction need to be recognized.
- Select **All** when license plates of vehicles from both the approaching direction and the leaving direction need to be recognized.

Motorcycle Capture

Enable the function to capture pictures of non-motor vehicles.

Filter Vehicle Head and Tail Pictures

- **Not Filter**: Both the vehicle head and tail pictures will be captured.
- **Filter Vehicle Head Picture**: The vehicle head pictures will not be captured.
- **Filter Vehicle Tail Picture**: The vehicle tail pictures will not be captured.

Picture Type

Select the captured picture type. The device supports capturing the scene picture, or the scene picture and the close-up picture.

3. Click **Save**.

5.1.2 Set Vehicle Feature Parameters

Set vehicle feature parameters when you need to capture the passing vehicle according to the vehicle features.

Steps

1. Go to **Configuration → Capture → Capture Parameters → Recognition Setting → Vehicle Feature** .
2. Check the vehicle features to be recognized.
3. Click **Save**.

5.1.3 Set Supplement Light Parameters

Supplement light can enhance the image stabilization and adjust the brightness and color temperature. It can supplement light at night or when the light is dim.

Steps

Note

Only when the constant light is connected, can the set parameters take effect.

1. Go to **Configuration → Capture → Capture Parameters → Supplement Light Parameters** .

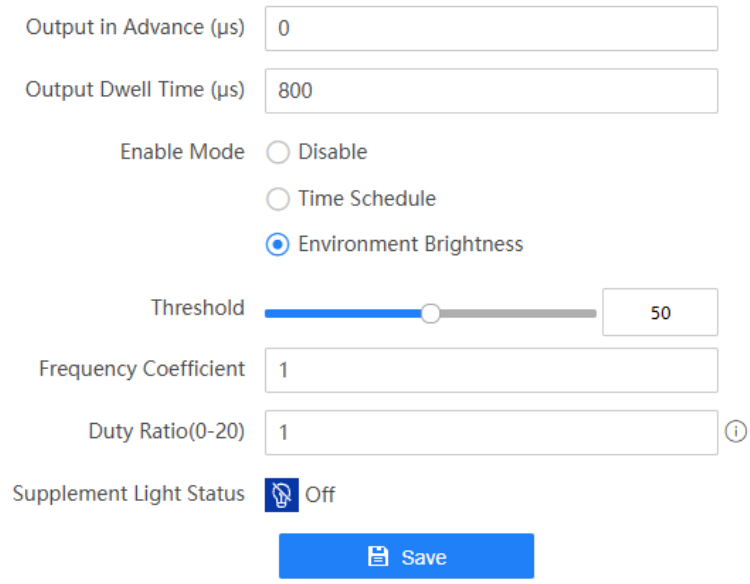

Figure 5-2 Set Supplement Light Parameters

2. Set the supplement light parameters according to actual conditions.

Output in Advance

It is the preact time [0 to 1000 μs] of the flash light, to ensure that the flash light is on when capture is triggered.

Output Dwell Time

It is the dwell time [0 to 10000 μs] after the flash light responds. The actual flash light supplement time is the result of the dwell time minus advanced time.

Enable Mode

Disable

Disable supplement light.

Time Schedule

Select it when you want the constant light to be enabled during fixed time period. Click **Time Schedule** to set the time periods to enable supplement light.

Environment Brightness

Select it when you want the constant light to be controlled by detecting the surroundings brightness automatically. Set the brightness threshold. The higher the threshold is, the harder the constant light can be enabled.

Frequency Coefficient

It is the frequency multiplication of 25 of output pulse by flash light, to keep the flash light as constant. You can set it as default value.

Duty Ratio

It is the time occupation of the high level in a certain period. The higher the duty ratio, the brighter the light. High duty ratio will cut life span of the light.

3. Click **Save**.

5.1.4 Set Capture Overlay

If you want to overlay information on the captured pictures, set capture overlay.

Steps

1. Go to **Configuration → Capture → Capture Parameters → Capture Overlay Configuration** .
2. Check **Enable Text Overlay**.
3. Set **Overlay Style**.

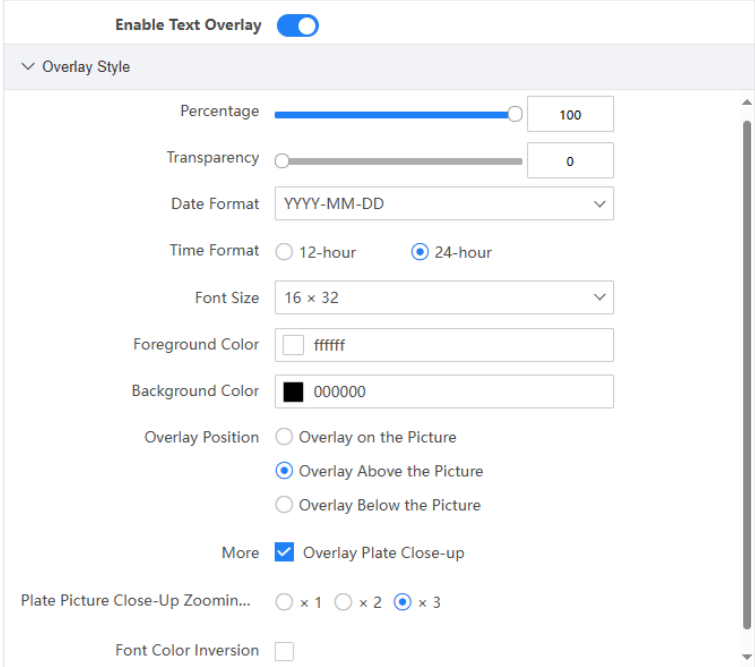

Figure 5-3 Set Overlay Style

Percentage

It is the percentage that the overlaid information occupies on the picture. For example, if you set the percentage to 50, the overlaid information in a row will occupy up to half of the image width, and the excess content will be overlaid from a new line.

Transparency

It is the condition of viewing the live view image through the overlaid information.

Overlay Plate Close-up

Enable the function to overlay a license plate close-up picture on the captured picture. Set **Plate Picture Close-Up Zooming Ratio** to adjust the close-up picture size.

Font Color Inversion

Enable the function to detect the gray level of the image overlaid position automatically. When the image color is dark, the overlaid characters will be displayed as white automatically. When the image color is light, the overlaid characters will be displayed as black automatically.

4. Set **Overlay Content**.

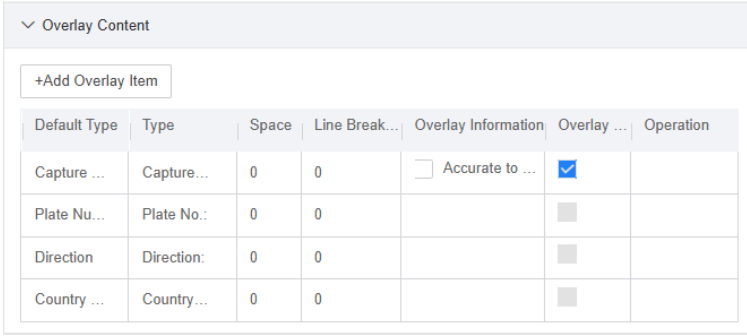

Figure 5-4 Set Single Picture Overlay Content

1) Click **Add Overlay Item** to select the information to overlay, and click **OK**.

Note

The overlay information varies with different models. The actual device prevails.

2) Set the parameters below.
   - **Default Type**: You can view the default overlay information name. If you have edited the name, you can refer to the default name for the definition.
   - **Type**: You can edit a custom overlay information name.
   - **Space**: Edit the number of space between the current information and the next one from 0 to 255. 0 means there is no space.
   - **Line Break Characters**: Edit the number of characters from 0 to 100 between the current information line and the previous information line. 0 means no line break.
   - **Overlay Information**: For some information types, you can edit the detailed information.
   - **Overlay Position**: If you check it, the current information will be displayed from a new line.
   - **Operation**: You can click ↑ / ↓ to adjust the display sequence of the overlay information, or click 🗑 to delete the item.

5. Click **Capture Test** to test the information overlay effect.
6. Click **Save**.

5.1.5 Set Image Encoding Parameters

If the captured pictures are not clear, set the resolution of the captured pictures and the picture size.

Steps

1. Go to **Configuration → Capture → Capture Parameters → Image Encoding and Composition** .

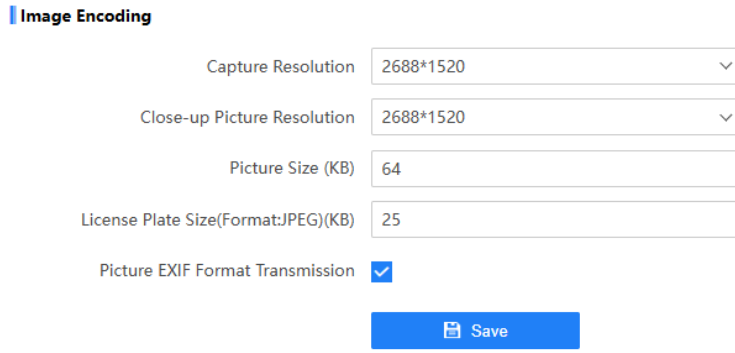

Figure 5-5 Set Image Encoding Parameters

2. Set the parameters below.

   Capture Resolution

   Select the resolution of the captured scene picture. When the picture size keeps the same, the higher the resolution, the more the picture will be compressed, and the slower the picture will be handled.

   Close-up Picture Resolution

   Select the resolution of the target close-up picture. When the picture size keeps the same, the higher the resolution, the more the picture will be compressed, and the slower the picture will be handled.

   Picture Size

   The size of the compressed captured picture. The actual size is related to the scene complexity.

   License Plate Size

   The size of the captured license plate close-up picture.

   Picture EXIF Format Transmission

   The captured pictures will be transmitted in the EXIF format.

3. Click **Save**.

5.1.6 Set Capture Schedule

You can set the capture schedule of the device.

Steps

1. Go to **Configuration → Capture → Capture Parameters → Capture Schedule** .
2. Click ✎ to set the capture schedule according to the actual needs.

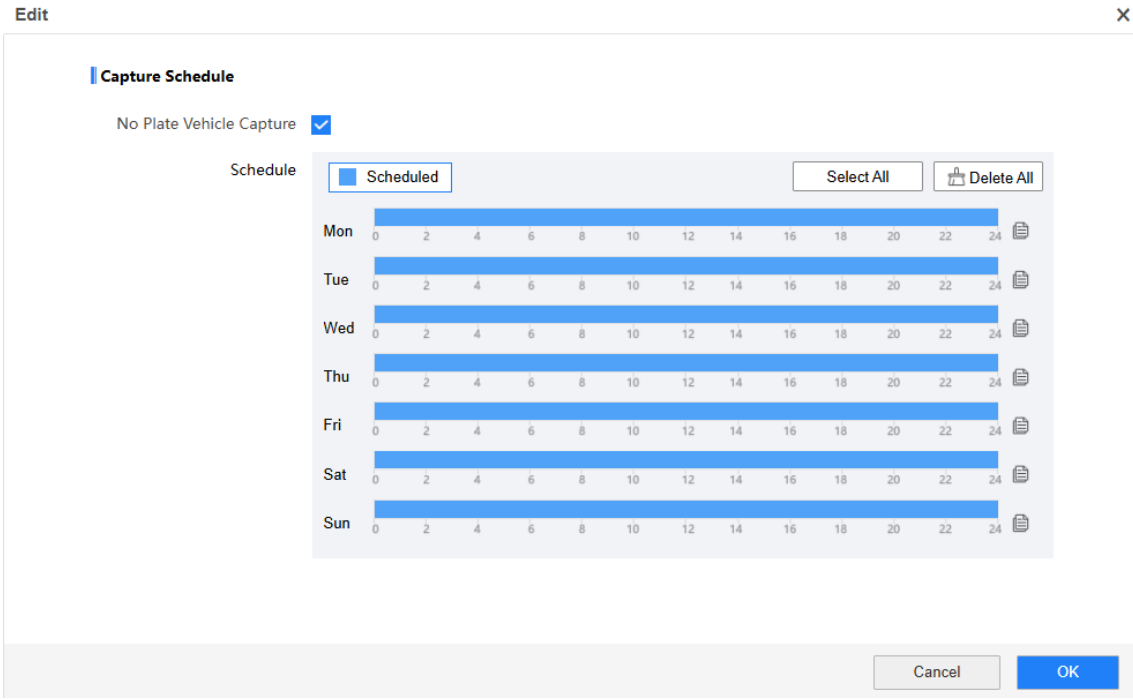

Figure 5-6 Set Capture Schedule

3. **Optional:** Enable **No Plate Vehicle Capture** to capture the vehicles without license plates if needed.
4. Adjust the time period.
   - Click on the selected time period, and enter the desired value. Click **Save**.
   - Click on the selected time period. Drag the both ends to adjust the time period.
5. **Optional:** Click to copy the same settings to other days.
6. Click **OK**.
7. **Optional:** Check **Upload to Mailbox** to email the capture schedule to the user.
8. Click **Save**.

5.2 Set Captured Image Parameters

Set the parameters of captured images to raise the image quality.

Steps

Note

The capture image parameters are only available when **Capture Type** is set as **Flash Light Mode** in **Quick Configuration**.

1. Go to **Configuration → Capture → Capture Images → Image Parameters** .

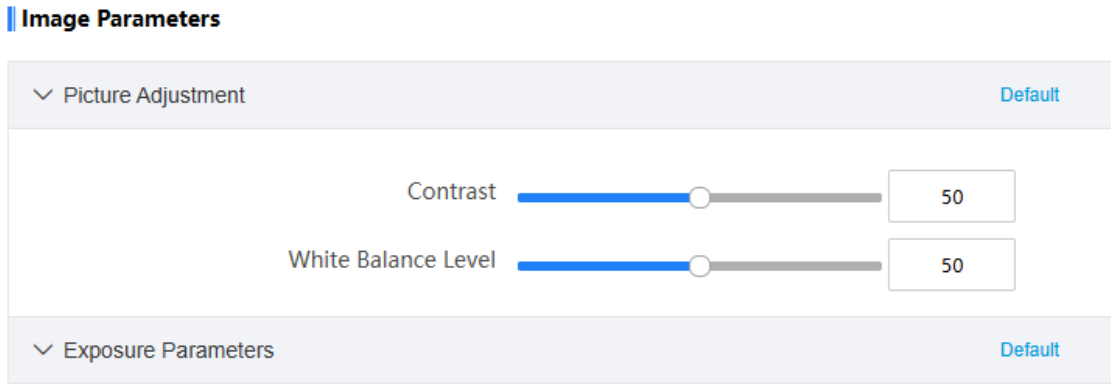

Figure 5-7 Set Captured Image Parameters

2. Set the captured image parameters.

Picture Adjustment

Contrast

It refers to the contrast of the image. Set it to adjust the levels and permeability of the image.

White Balance Level

It is the white rendition function of the device used to adjust the color temperature according to the environment.

Exposure Parameters

Brightness

It refers to the max. brightness of the image.

Shutter

If the shutter speed is quick, the details of the moving objects can be displayed better. If the shutter speed is slow, the outline of the moving objects will be fuzzy and trailing will appear.

Daytime Shutter

The shutter speed at the daytime.

Gain

It refers to the upper limit value of limiting image signal amplification. It is recommended to set a high gain if the illumination is not enough, and set a low gain if the illumination is enough.

Daytime Brightness Enhancement

It refers to the brightness of the image in the daytime. Higher value stands for brighter image.

5.3 Advanced Configuration

Note

The advanced configurations below are only provided to debug the device by the professionals.

5.3.1 System Service

You can enable the functions to debug the device.

Steps

1. Go to **Configuration → Capture → Advanced → System Service** .
2. Check the debug information according to your needs.

   Note

   The supported parameters vary with different models. The actual device prevails.

   Enable Algorithm POS Information Debug

   The algorithm POS information will be overlaid on the playback image when you play back the video with the dedicated tool.

   Show License Plate Frame

   Enable the function to overlay license plate frames on the captured pictures.

   Capture information debugging enable

   Check to enable capture information debugging.

   Enable Closed Positioning Frame

   The bottom lines of the positioning frames on the captured pictures will be displayed. The frames will be closed.

   Capture Interval Enable

   Check to enable parking vehicle detection. When there is parking vehicle detected, the device will capture pictures according to the set **Capture Interval Time**.
3. Click **Save**.

5.3.2 Vehicle Capture and Recognition Service

Set the vehicle capture and recognition service to debug the device.

Steps

Note

The function varies with different models. The actual device prevails.

1. Go to **Configuration → Capture → Advanced → Vehicle Capture and Recognition Service** .
2. Check the service(s) according to your needs.

Note

The supported services vary with different models. The actual device prevails.

Picture Upload

Time of Filtering Checkpoint Duplicate License Plates

It is used to debug the device with the same vehicle. When the same vehicle is triggered many times during the set time in the scene, the checkpoint pictures of the vehicle will not be captured.

Enable Vehicle Type Mapping

Enable the function, and when the device recognizes the vehicle types as shown in the figure left column below, the corresponding mapped vehicle type fields as shown in the figure right column below will be output for the OSD and the ANPR protocol message.

Table 5-1 Vehicle Type Mapping

Recognized Vehicle Type	Output Vehicle Type Field
Motorcycle	twoWheelVehicle
Mini bus, large bus, van	bus
Buggy, medium heavy truck	truck
SUV/MPV, pickup truck	vehicle

Capture Distance

Select **Capture Distance** according to the actual scene.

Slope Scene

Check **Enable Slope Scene** to enable the license plate recognition and capture in slope scenes.

Coil Triggered Capture

For I/O trigger and dual I/O trigger types, set the coil triggered capture parameters.

Coil Default Status

NO means the coils are enabled, and **NC** means the coils are disabled.

Capture Triggered Time

Select **Entry** to trigger capture when the vehicle is entering. Select **Exit** to trigger capture when the vehicle is exiting.

Focus Detection

Enable focus detection to detect the live view image. If the image is obscure, alarms will be triggered and uploaded to the platform or the connected terminal to prompt that the lens needs to be focused.

3. Click **Save**.

Chapter 6 View Real-Time Picture

You can view the real-time captured pictures and license plate information.

Steps

1. Click **Live View**.
2. Click **Draw Lane Line** under the live view image, and adjust the detection area and trigger line according to the actual scene. Click **Save** to save the drawing.
3. Click **Arming** on the right **Real-Time Capture** window.
4. Select an item from the list, and you can view the capture scene picture and recognized license plate information.

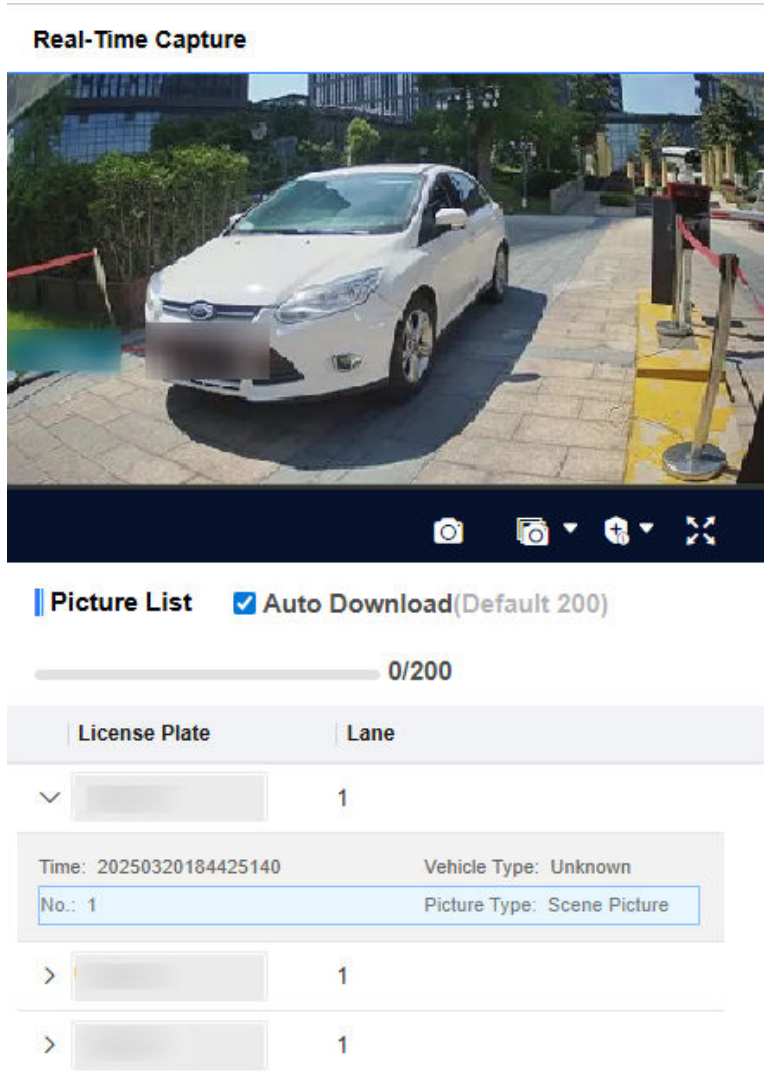

Figure 6-1 Real-Time Picture

5. **Optional:** Other operations.

/	• **Level 1 Arming**: Only the current computer can arm the device and receive the captured pictures in real time. The pictures will not be stored in the storage card. The pictures in the storage card will be uploaded to the level 1 arming terminal. • **Disarming**: Disable the real-time capture function.
	Click it to capture a picture manually.
	Click the arrow to set continuous capture parameters and then click the icon to enable continuous capture manually. The device will capture pictures according to the set interval.

- **Trigger Channel**: If the camera has multiple channels, enter the channel No. to enable continuous capture.
- **Waiting Time**: Set the interval between continuous captures when triggering continuous capture continuously.
- **Capture Times**: Select the number of captured pictures per continuous capture.
- **Interval**: Set the interval between each capture in the continuous capture. Up to four intervals can be set, and the default interval is 100 ms.

	Click it to display the captured picture in full screen mode. Press **Esc** on the keyboard to exit from the full screen mode.
Open Folder	If the plug-in has been installed, the button will display on the interface. You can click it to open the saving path of captured pictures.
Auto Download	In no plug-in mode, you can enable **Auto Download** to download the captured pictures to the computer directly. The latest captured pictures will be downloaded and compressed as a file in the format of .zip automatically. The max. number of pictures in one compressed file depends on the selected **Number of Auto Captured Pictures** in **Configuration → Local** in no plug-in mode. If you disarm, the auto downloading will stop. You can view the downloading progress on the interface. The auto downloaded files will be saved to the default downloading directory of the browser in the format of .zip. You can go to the directory, decompress the file, and view the captured pictures. If you disable **Auto Download**, when you disarm, the dialogue box will pop up to prompt you if you need to download the arming captures. Click **OK** and the latest captured pictures will be downloaded and compressed as a file in the format of .zip automatically.

Chapter 7 Live View and Local Configuration

7.1 Live View

7.1.1 Start/Stop Live View

Click to start live view. Click to stop live view.

7.1.2 Select Image Display Mode

Click to select an image display mode.

7.1.3 Select Window Division Mode

Click to select a window division mode.

7.1.4 Select Stream Type

Click to select the stream type. It is recommended to select the main stream to get the high-quality image when the network condition is good, and select the sub-stream to get the fluent image when the network condition is not good enough.

Note

The supported stream types vary with different models. The actual device prevails.

7.1.5 Capture Picture Manually

You can capture pictures manually on the live view image and save them to the computer.

Steps

1. Click to capture a picture.
2. **Optional:** Click **Configuration → Local → Picture and Clip Settings** to view the saving path of snapshots in live view.

7.1.6 Record Manually

You can record videos manually on the live view image and save them to the computer.

Steps

1. Click to start live view.
2. Click to start recording.
3. Click to stop recording.
4. **Optional:** Click **Configuration → Local → Record File Settings** to view the saving path of record files.

7.1.7 Enable Digital Zoom

You can enable digital zoom to zoom in a certain part of the live view image.

Steps

1. Click to start live view.
2. Click to enable digital zoom.
3. Place the cursor on the live view image position which needs to be zoomed in. Drag the mouse rightwards and downwards to draw an area.

   The area will be zoomed in.
4. Click any position of the image to restore to normal image.
5. Click to disable digital zoom.

7.1.8 Select Video Mode

Set the video mode when adjusting the device focus during construction.

Click to select the normal mode when the device is running normally.

7.2 Set Snapshot Mode

Click **Live View**, and you can enable or disable snapshot mode on the upper right corner of the interface.

- : The snapshot mode is enabled. In this mode, only the image in the live view interface is in real-time streaming, and the live view images in other interfaces are just pictures. You can refresh the interfaces to refresh the pictures. For the conditions that the network is unstable, or the computer performance is not that good, you're recommended to enable snapshot mode to raise the operation efficiency.
- : The snapshot mode is disabled. All the live view images are in real-time streaming.

Note

Disable snapshot mode before drawing areas for cropping capture pictures, ROI, privacy mask, and regional exposure.

7.3 Local Configuration

Go to **Configuration → Local** to set the live view parameters and change the saving paths of videos, captured pictures, scene pictures, etc.

Note

The interfaces in no plug-in mode and plug-in mode are different.

Local Configuration in Plug-in Mode

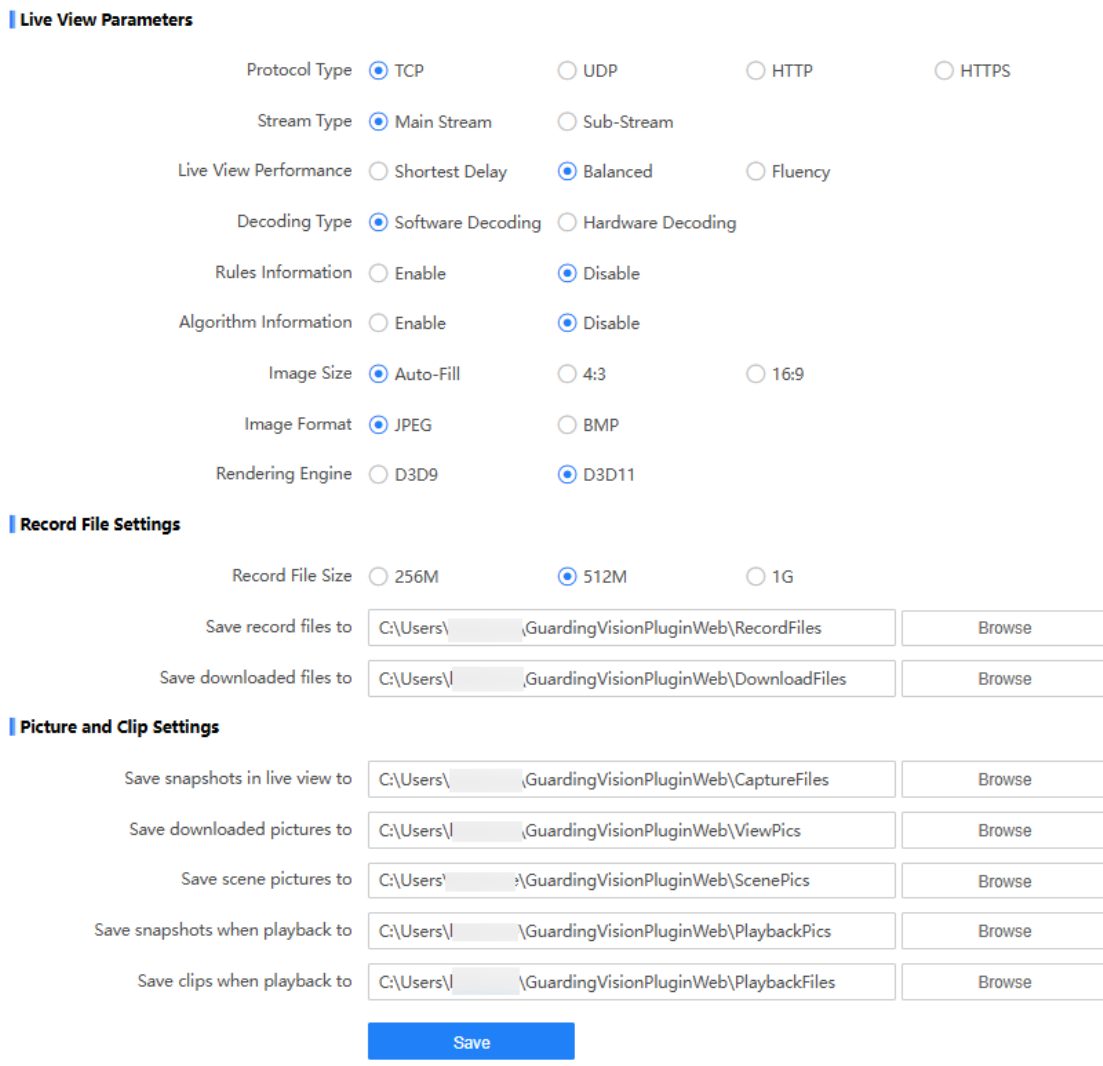

Figure 7-1 Local Configuration in Plug-in Mode

Protocol Type

Select the network transmission protocol according to the actual needs.

TCP

Ensures complete delivery of streaming data and better video quality, but the real-time transmission will be affected.

UDP

Provides real-time audio and video streams.

HTTP

Gets streams from the device by a third party client.

HTTPS

Gets streams in https format.

Stream Type

Main Stream

Select it to get the high-quality image when the network condition is good.

Sub-Stream

Select it to get the fluent image when the network condition is not good enough.

Live View Performance

Shortest Delay

The video is real-time, but its fluency may be affected.

Balanced

Balanced mode considers both the real time and fluency of the video.

Fluency

When the network condition is good, the video is fluent.

Decoding Type

Software Decoding

Decode via software. It takes up more CPU resources but provides images with better quality when it compares to the hardware decoding.

Hardware Decoding

Decode via GPU. It takes up less CPU resources but provides images with worse quality when it compares to the software decoding.

Rules Information

If you enable this function, tracking frames will be displayed on the live view interface when there are vehicles passing.

Algorithm Information

Enable it to display feature information of the target on the live view image.

Image Size

The display ratio of the live view image.

Image Format

The saving format of manually captured images.

Rendering Engine

Select the rendering API of the browser. D3D9 uses fixed rendering pipeline. D3D11 uses programmable graphics pipeline, in which the shader replaces the traditional fixed rendering pipeline to improve visual effects and enhance the picture quality.

Record File Size

Select the packed size of the manually recorded video files. After the selection, the max. record file size is the value you selected.

Save record files to

Set the saving path of the manually recorded video files.

Save downloaded files to

Set the saving path of the download files.

Save snapshots in live view to

Set the saving path of the manually captured pictures in live view mode.

Save downloaded pictures to

Set the saving path of the downloaded pictures.

Save scene picture to

Set the saving path of the captured pictures in **Live View → Real-Time Capture** .

Save snapshots when playback to

Set the saving path of the manually captured pictures in playback mode.

Save clips when playback to

Set the saving path of the clips in playback mode.

Local Configuration in No Plug-in Mode

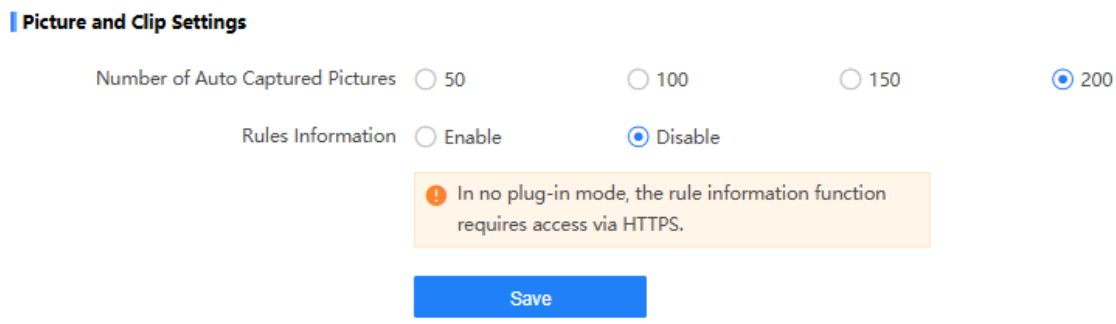

Figure 7-2 Local Configuration in No Plug-in Mode

Number of Auto Captured Pictures

Select the max. number of auto downloaded pictures in one compressed file in **Live View → Real-Time Capture** in no plug-in mode.

Rules Information

If you enable this function, tracking frames will be displayed on the live view interface when there are vehicles passing.

Note

In no plug-in mode, the rule information function requires access via HTTPS.

Chapter 8 Record and Capture

8.1 Set Storage Media

If you want to store the files to the storage media, make sure you install, format, and set the storage media in advance.

Before You Start

Install the storage media to the device.

Steps

1. Go to **Configuration → Storage → Storage Management → HDD Management** .

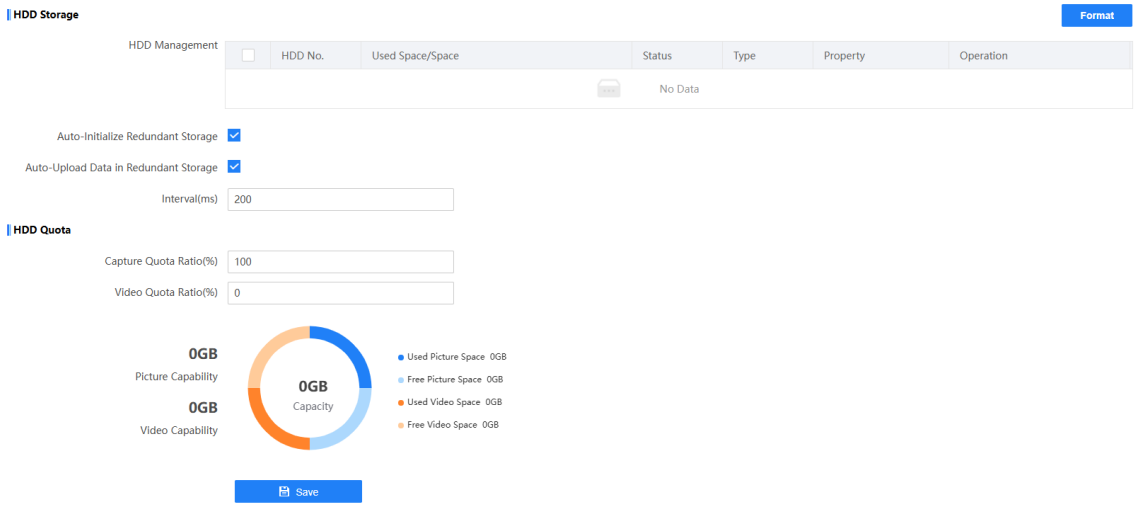

Figure 8-1 Set Storage Media

2. Format the storage media in two ways.
   - Check the storage media, and click **Format** to format it manually.

     Note

     For the newly installed storage media, you need to format it manually before using it normally.
   - If you want to format the storage media automatically when the media is abnormal, check **Auto-Initialize Redundant Storage**.
3. Set other parameters.

   Auto-Upload Data in Redundant Storage

   If the device has been connected to the platform, and you want to upload the storage media information automatically, enable the function and set the interval.
4. Set **Capture Quota Ratio** and **Video Quota Ratio** according to the actual needs.

Note

The percentage sum of the capture and video quota ratio should be 100 %.

5. Click **Save**.

8.2 Set Record Schedule

Set record schedule to record video automatically during configured time periods.

Before You Start

Install the storage media.

Steps

1. Go to **Configuration → Storage → Schedule Settings → Record Schedule** .
2. Select **Record Stream**.
3. **Optional:** Enable the functions below according to your needs.

   Enable Overwritten Recording

   When the storage is full, the earliest videos will be overwritten.

   Enable Storing Expiration

   Enable the function and set **Expired Time** for the recorded videos stored in the storage card. Beyond the time, the files will be overwritten.
4. Enable the record schedule.

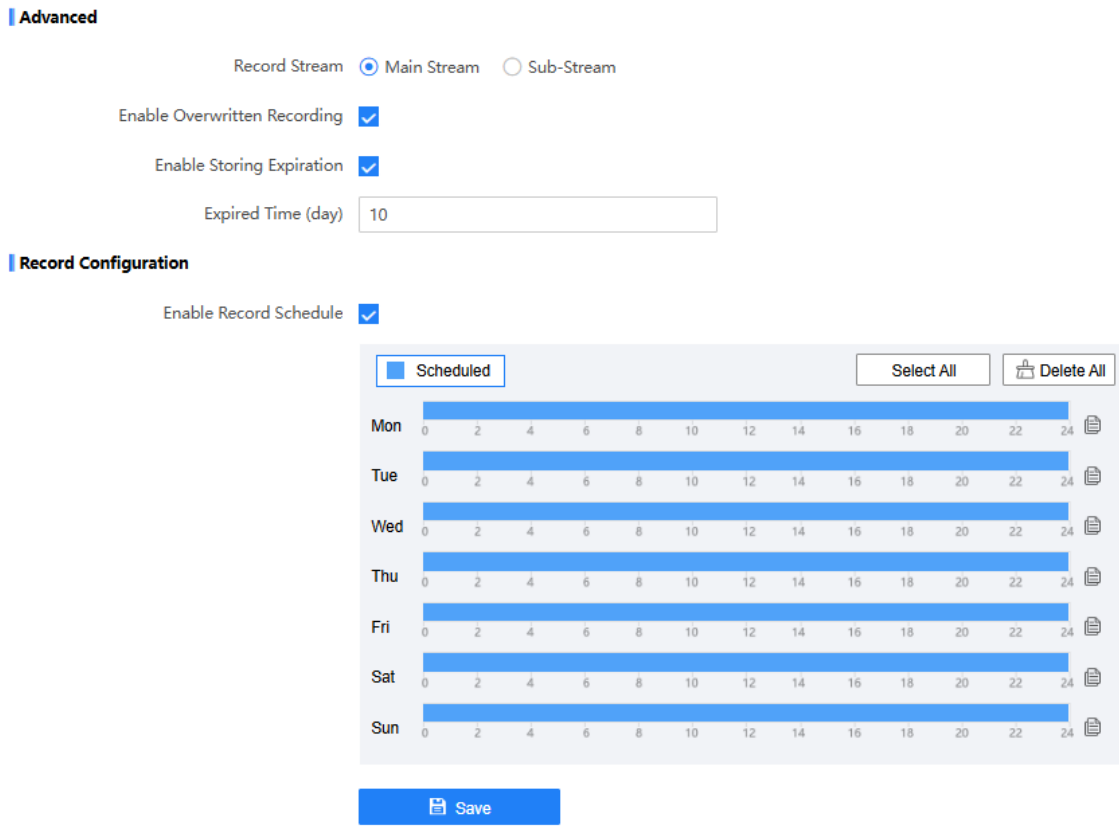

Figure 8-2 Set Record Schedule

5. Click **Select All** to enable the device to record the whole days. Or drag the cursor on the time bar to set a recording time.

Note

Up to 8 time periods can be set on a time bar.

6. Adjust the recording time.
   - Click a set recording period and enter the start time and end time in the pop-up window.
   - Drag two ends of the set recording period bar to adjust the length.
   - Drag the whole set recording period bar and relocate it.
7. **Optional:** Delete recording periods.
   - Click a set recording period and click **Delete** in the pop-up window.
   - Click **Delete All** on the record configuration interface to delete all the schedules.
8. **Optional:** Click to copy the settings to other days.
9. Click **Save**.

Result

The device will only record at the set periods.

8.3 Set Snapshot Schedule

You can enable storage expiration of the snapshots saved in the storage media.

Before You Start
Install the storage media.

Steps
1. Go to **Configuration → Storage → Schedule Settings → Snapshot Schedule** .

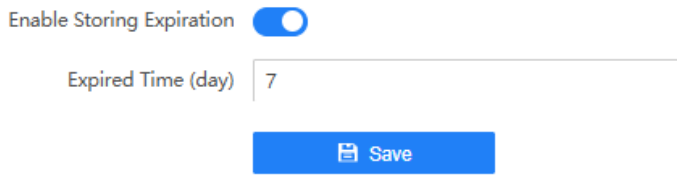

Figure 8-3 Set Snapshot Schedule

2. Enable storing expiration.
3. Set **Expired Time**.
4. Click **Save**.

Result

Beyond the set expired time, the snapshots saved in the storage media will be overwritten.

Chapter 9 Playback

You can search, play back, and download videos that stored on the storage card.

Steps

1. Click **Playback**.
2. Select a channel.
3. Select a date.
4. Click **Search**.
5. Click ▶ to start playback.
6. **Optional:** You can also do the following operations.
   - Set playback time:
     - Drag the time bar to the target time and click ▶ to play the video.
     - Click the current time point showed above the time bar and enter the target time point in the popup window. Click **OK** and click ▶ to play the video.
   - Click to capture an image.
   - Click / to start/stop clipping the record.
   - Click once to play back the video in one frame.
   - Download record:
     a. Click .
     b. Select the start time and end time.
     c. Click **Search**.
     d. Check record files that need to be downloaded.
     e. Click **Download**.
   - Click ■ to stop playback.
   - Click « to slow down the playback.
   - Click » to speed up the playback.
   - Click / to enable/disable digital zoom.

Chapter 10 Encoding and Display

10.1 Set Camera Parameters

You can adjust the camera parameters to get clear image.

Steps

Note

The supported parameters may vary with different models. The actual device prevails.

1. Go to **Configuration → Video → Camera Parameters → Camera Parameters** .

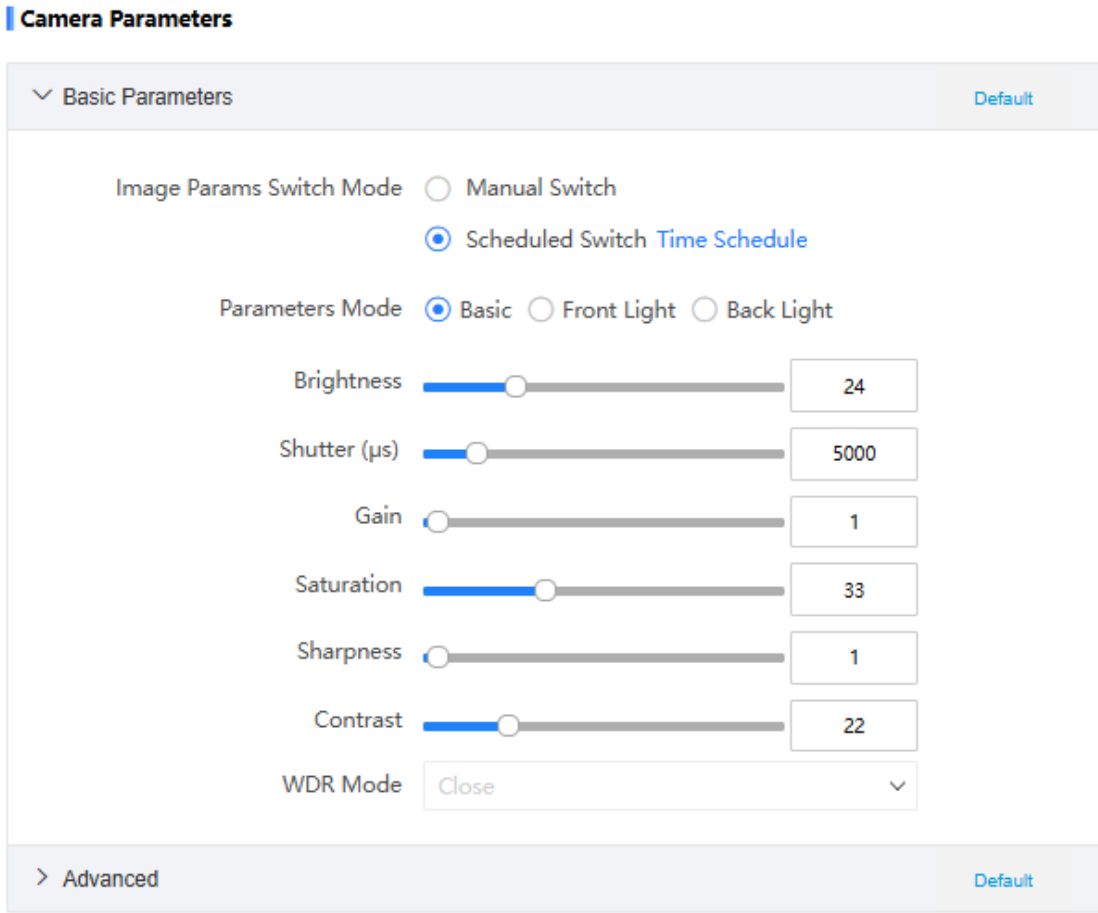

Figure 10-1 Set Camera Parameters

2. Set the camera parameters.

Note

Click **Default** to reset parameters.

Basic Parameters

Image Params Switch Mode

- **Manual Switch**: The camera parameters set for the selected **Parameters Mode** will take effect.
- **Scheduled Switch**: Click **Time Schedule** to set the time periods during which the camera parameters set for the front light or back light mode take effect. Select the corresponding light, and drag the cursor on the time bar to set a time period. Up to 2 time periods can be set on a time bar totally. The camera parameters set for basic mode will take effect outside the set time periods of front light or back light.

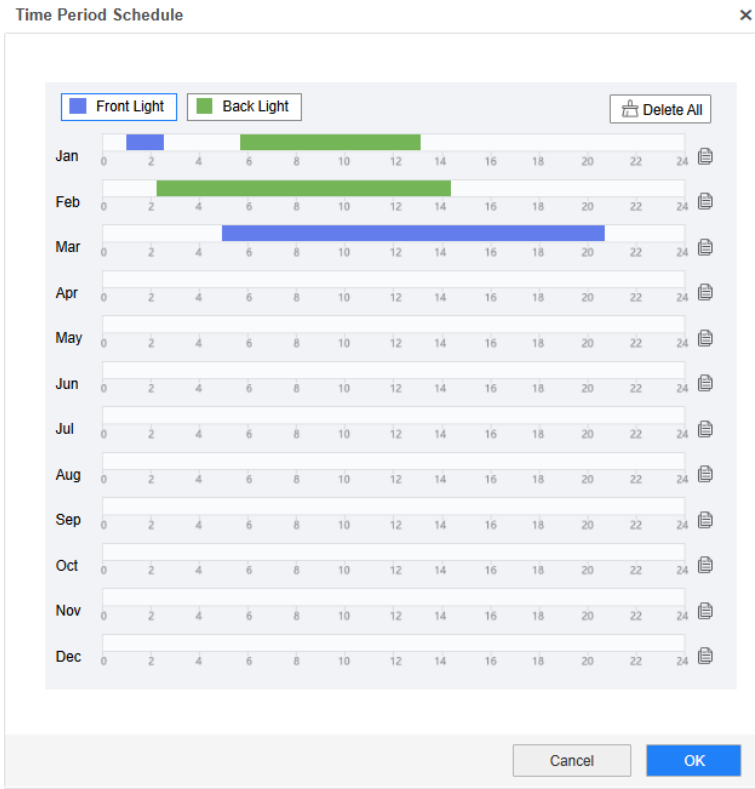

Figure 10-2 Set Time Schedule for Front or Back Light Mode

Parameters Mode

The supported camera parameters vary with different modes. Select a mode the set the corresponding parameters.

Brightness

It refers to the brightness the image.

Shutter

If the shutter speed is quick, the details of the moving objects can be displayed better. If the shutter speed is slow, the outline of the moving objects will be fuzzy and trailing will appear.

Gain

It refers to the upper limit value of limiting image signal amplification. It is recommended to set a high gain if the illumination is not enough, and set a low gain if the illumination is enough.

Saturation

It refers to the colorfulness of the image color.

Sharpness

It refers to the edge contrast of the image.

Contrast

It refers to the contrast of the image. Set it to adjust the levels and permeability of the image.

WDR Level

Wide Dynamic Range (WDR) can be used when there is a high contrast of the bright area and the dark area of the scene. When you select **Parameters Mode** as **Front Light** or **Back Light**, you can adjust the WDR level. The higher the level is, the higher the WDR strength is.

Advanced

White Balance

It is the white rendition function of the device used to adjust the color temperature according to the environment.

Hue Range

Select the range to adapt to the display.

Gamma Correction

The higher the gamma correction level is, the stronger the correction strength is.

Slow Shutter

This function can be used in underexposure condition. It lengthens the shutter time to ensure full exposure. The higher **Slow Shutter Level** is, the slower the shutter speed is.

Video Standard

Select the video standard according to the actual power supply frequency.

Brightness Enhancement at Night

The scene brightness will be enhanced at night automatically.

Plate Brightness Compensation

Check it. The plate brightness compensation can be realized, and various light supplement conditions can be adapted via setting license plate expectant brightness and supplement light correction coefficient. The higher the sensitivity is, the easier this function can be enabled.

3D DNR

Digital Noise Reduction (DNR) reduces the noise in the video stream.

In **Normal Mode**, the higher the **3D DNR Level** is, the stronger the noise will be reduced. But if it is too high, the image may become fuzzy.

In **Expert Mode**, set **Spatial Intensity** and **Time Intensity**. If the space domain intensity is too high, the outline of the image may become fuzzy and the details may lose. If the time domain intensity is too high, trailing may appear.

2D DNR

The higher the **2D DNR Level** is, the stronger the noise will be reduced. But if it is too high, the image may become fuzzy.

Defog

Enable defog to get a clear image in foggy days.

3. **Optional:** Click **Capture Test** to check the image.

10.2 Set OSD

You can customize OSD information on the live view.

Steps

1. Go to **Configuration → Video → Text Overlay on Video** .

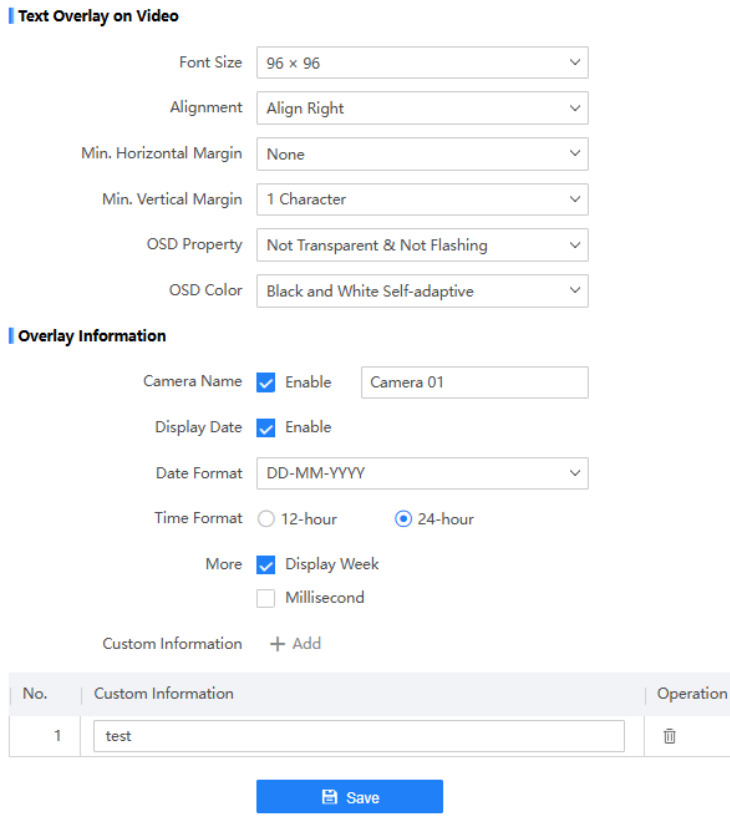

Figure 10-3 Set OSD

2. Set display properties (font, color, etc.).

   Alignment

   If you select **Align Left** or **Align Right**, set **Min. Horizontal Margin** and **Min. Vertical Margin**.

3. Set display contents.
   1) Enable **Camera Name**, and enter the camera name.
   2) Enable **Display Date**, and set the time and date format.
   3) Enable **Display Week** or **Millisecond** according to your needs.
4. **Optional:** Click **Add** and enter information if you want to add custom information.

   Note

   Up to 6 items of custom information can be added.

5. Drag the red frames on the live view image to adjust the OSD positions.
6. Click **Save**.

Result

The set OSD will be displayed in live view image and recorded videos.

10.3 Set Video Encoding Parameters

Set video encoding parameters to adjust the live view and recording effect.

- When the network signal is good and the speed is fast, you can set high resolution and bitrate to raise the image quality.
- When the network signal is bad and the speed is slow, you can set low resolution, bitrate, and frame rate to guarantee the image fluency.
- When the network signal is bad, but the resolution should be guaranteed, you can set low bitrate and frame rate to guarantee the image fluency.
- Main stream stands for the best stream performance the device supports. It usually offers the best resolution and frame rate the device can do. But high resolution and frame rate usually means larger storage space and higher bandwidth requirements in transmission. Sub-stream usually offers comparatively low resolution options, which consumes less bandwidth and storage space. Third stream is offered for customized usage.

Steps

Note

The supported parameters vary with different models. The actual device prevails.

1. Go to **Configuration → Video → Video Encoding → Video Encoding** .
2. Set the parameters for different streams.

   Stream Type

   Select the stream type according to your needs.

   Bitrate

   Select relatively large bitrate if you need good image quality and effect, but more storage spaces will be consumed. Select relatively small bitrate if storage requirement is in priority.

   Frame Rate

   It is to describe the frequency at which the video stream is updated and it is measured by frames per second (fps). A higher frame rate is advantageous when there is movement in the video stream, as it maintains image quality throughout.

   Resolution

   The higher the resolution is, the clearer the image will be. Meanwhile, the network bandwidth requirement is higher.

   SVC

   Scalable Video Coding (SVC) is an extension of the H.264/AVC and H.265 standard. Enable the function and the device will automatically extract frames from the original video when the network bandwidth is insufficient.

   Bitrate Type

   Select the bitrate type to constant or variable.

Video Quality

When bitrate type is variable, 6 levels of video quality are selectable. The higher the video quality is, the higher requirements of the network bandwidth.

Profile

When you select H.264 or H.265 as video encoding, you can set the profile. Selectable profiles vary according to device models.

I Frame Interval

It refers to the number of frames between two key frames. The larger the I frame interval is, the smaller the stream fluctuation is, but the image quality is not that good.

Video Encoding

The device supports multiple video encoding types, such as H.264, H.265, and MJPEG. Supported encoding types for different stream types may differ. H.265 is a new encoding technology. Compared with H.264, it reduces the transmission bitrate under the same resolution, frame rate, and image quality.

3. Click **Save**.

10.4 Set ROI

ROI (Region of Interest) encoding helps to assign more encoding resources to the region of interest, thus to increase the quality of the ROI whereas the background information is less focused.

Before You Start

Please check the video encoding type. ROI is supported when the video encoding type is H.264 or H.265.

Steps

1. Go to **Configuration → Video → Video Encoding → ROI** .

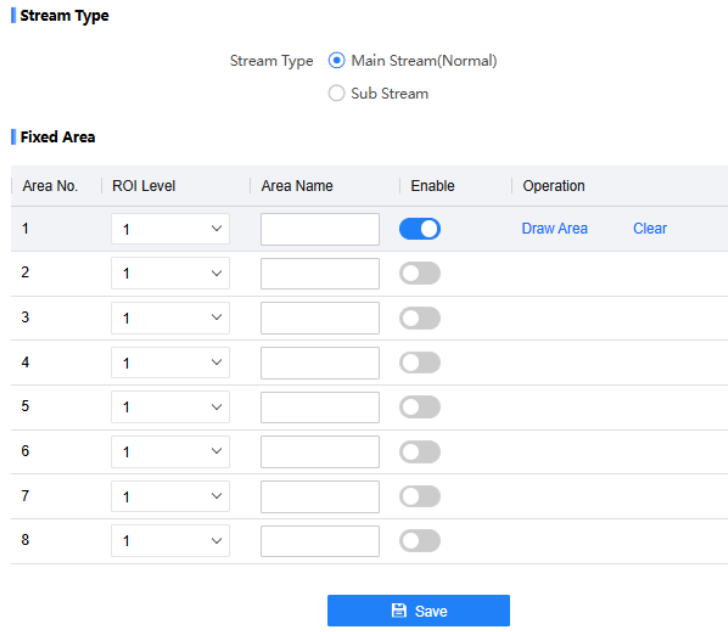

Figure 10-4 Set ROI

2. Select **Stream Type**.
3. Set ROI area.
   1) Enable the corresponding area.
   2) Select **ROI Level**.

   Note

   The higher the ROI level is, the clearer the image of the detected area is.

   3) Enter **Area Name**.
   4) Click **Draw Area**.
   5) Drag the mouse on the live view image to draw the fixed area.
   6) Select the fixed area that needs to be adjusted and drag the mouse to adjust its position.
   7) Click **Stop Drawing**.
   8) Repeat the steps above to set more areas. Up to 8 areas are supported.
   9) **Optional:** If you want to delete the area, click **Clear** to delete.
4. Click **Save**.

10.5 Set Privacy Mask

The privacy mask can be used to protect personal privacy by concealing parts of the image from view or recording with a masked area.

Steps

1. Go to **Configuration → Video → Video Encoding → Privacy Mask** .

2. Enable privacy mask.

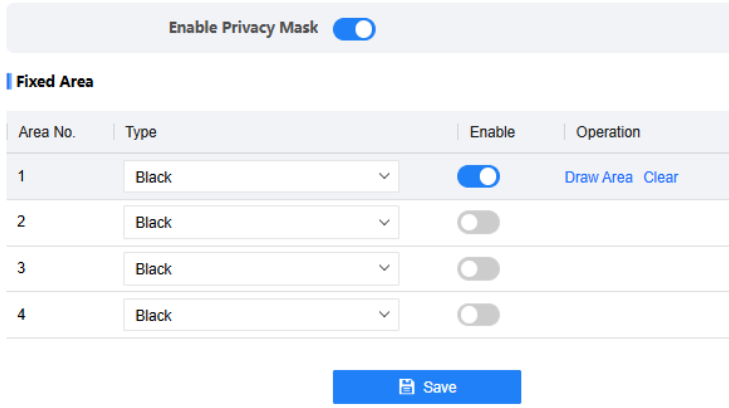

Figure 10-5 Set Privacy Mask

3. Set the privacy mask area.
   1) Enable the corresponding privacy mask area.
   2) Select **Type**.
   3) Click **Draw Area**.
   4) In the live view image, drag the mouse to draw the privacy mask area of the selected area No.
   5) Click **Stop Drawing**.
   6) Repeat the steps above to set more areas. Up to 4 areas are supported.
   7) **Optional:** If you want to delete the area, click **Clear** to delete.
4. Click **Save**.

10.6 Enable Regional Exposure

Enable regional exposure to expose partial area of the live view image.

Steps

1. Go to **Configuration → Video → Video Encoding → BLC** .
2. Enable **Regional Exposure**.
3. Drag the mouse to draw an area in the live view image.

   The drawn area will be exposed.
4. Click **Save**.

Chapter 11 Event and Alarm

11.1 Exception Alarm

Set exception alarm when the network is disconnected, the IP address is conflicted, etc.

Steps

Note

The supported exception types vary with different models. The actual device prevails.

1. Go to **Configuration → Event → Alarm Linkage → Exception** .
2. Select the exception type(s) and the linkage method.
3. Click **Save**.

11.2 Set Email

When the email is enabled and set, the device will send an email notification to all designated receivers if an alarm event is detected.

Before You Start

Set the DNS server before using the email function. Go to **Configuration → Network → Network Parameters → Network Interface** for DNS settings.

Steps

1. Go to **Configuration → Network → Data Connection → Email** .
2. Enable Email.

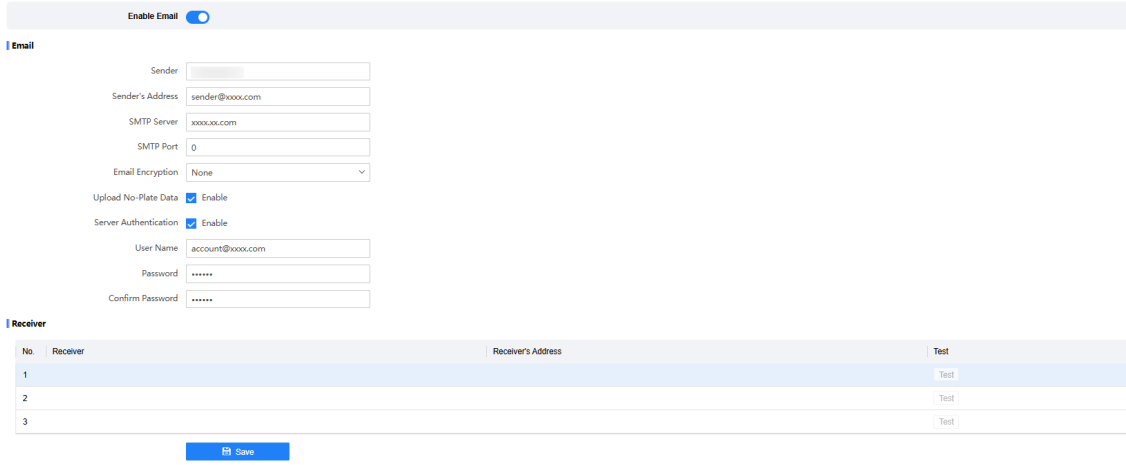

Figure 11-1 Set Email

3. Set email parameters.

1) Enter the sender's email information, including **Sender**, **Sender's Address**, **SMTP Server**, and **SMTP Port**.
2) Select **Email Encryption**.

   None

   Emails are sent without encryption.

   TLS

   Emails are sent after being encrypted by TLS.
3) **Optional:** If you want to upload no-plate data, enable **Upload No-Plate Data**.
4) **Optional:** If your email server requires authentication, enable **Server Authentication** and enter your user name and password to log in to the server.
5) Enter the receiver's information, including the receiver's name and address.
6) **Optional:** Click **Test** to test if the function is well configured.

4. Click **Save**.

11.3 Set Email Event

When the set event occurs, the device can be set to send an email with alarm information to the user.

Before You Start

The email has been enabled and related email parameters have been configured.

Steps

1. Go to **Configuration → Event → Alarm Linkage → Email Event** .

2. Enable linkage to trigger an email for login alarm.

3. Click **Save**.

11.4 Set Cabinet Alarm

You can set the cabinet alarm to get alarm notifications when the cabinet is opened.

Before You Start

Connect a cabinet to the device.

Steps

1. Go to **Configuration → System → Peripheral Configuration → Cabinet Alarm** .

2. Enable **Cabinet Alarm**.

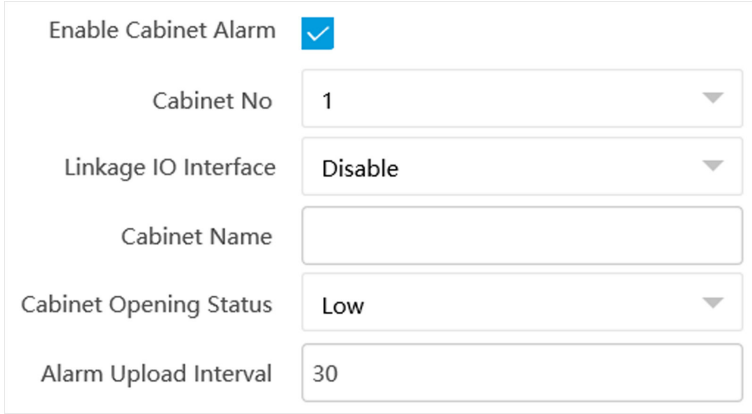

Figure 11-2 Set Cabinet Alarm

3. Set **Cabinet No.** and **Cabinet Name** according to the actually conditions.
4. Select **Linked I/O** to link the cabinet to the I/O interface of the device.
5. Set **Alarm Upload Interval**. When the cabinet is opened, the alarm notifications will be uploaded according to the set interval.
6. Click **Save**.

Chapter 12 Safety Management

12.1 Manage User

The administrator can add, modify, or delete other accounts, and grant different permissions to different user levels.

Steps

1. Go to **Configuration → System → User Management → User List** .
2. Add a user.

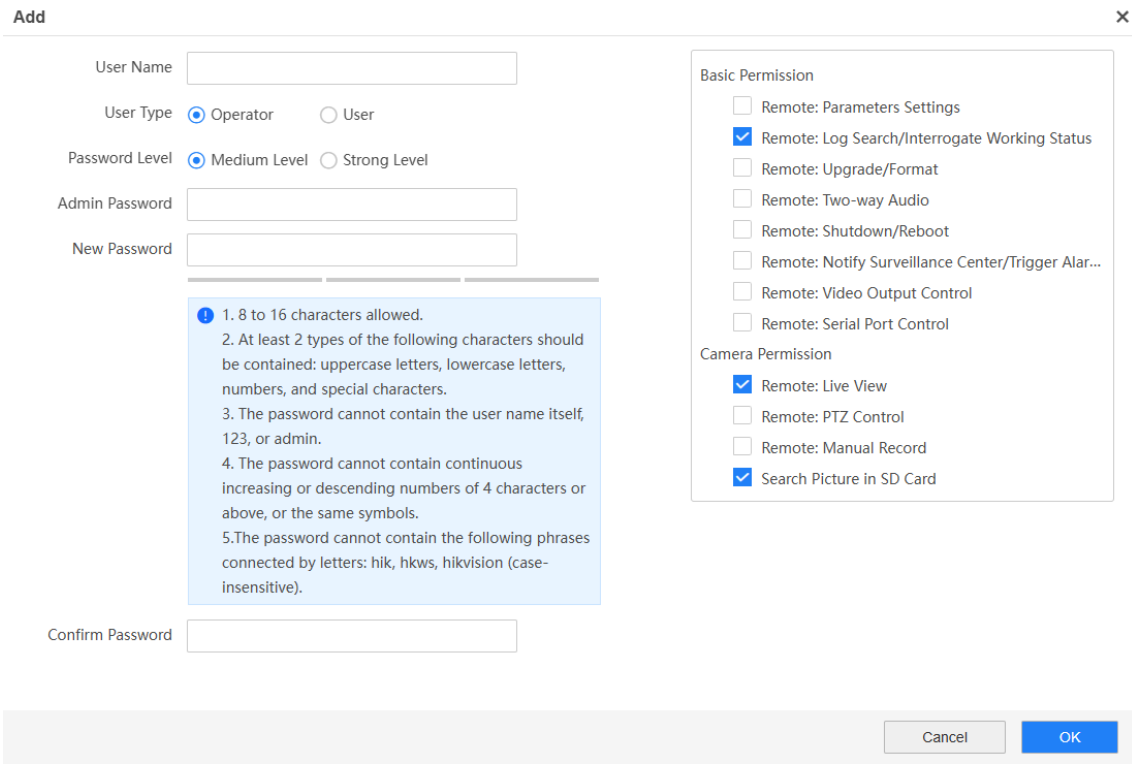

Figure 12-1 Add User

1) Click **Add**.
2) Enter **User Name** and select **User Type**.
3) Select **Password Level**. The password level of the added user should conform to the selected level.
4) Enter **Admin Password**, **New Password**, and confirm the password.

Caution

To increase security of using the device on the network, please change the password of your account regularly. Changing the password every 3 months is recommended. If the device is

used in high-risk environment, it is recommended that the password should be changed every month or week.

5) Assign remote permissions to users based on needs.

User

Users can be assigned permissions of viewing live video and changing their own passwords, but no permissions for other operations.

Operator

Operators can be assigned all permissions except for operations on the administrator and creating accounts.

6) Click **OK**.

3. **Optional:** You can do the following operations.

Edit the user information	Click to edit the user information.
Delete the user	Click to delete the user.

12.2 Enable User Lock

To raise the data security, you are recommended to lock the current IP address.

Steps

1. Go to **Configuration → System → Security → Security Service → Software** .
2. Enable user lock.
3. Click **Save**.

Result

When the times you entered incorrect passwords have reached the limit, the current IP address will be locked automatically.

12.3 Set SSH

To raise network security, disable SSH service. The configuration is only used to debug the device for the professionals.

Steps

1. Go to **Configuration → System → Security → Security Service → Software** .
2. Disable **SSH Service**.
3. Click **Save**.

12.4 Prohibit PING

You can prohibit the external devices to operate network connection volume test to the current device.

Steps

1. Go to **Configuration → System → Security → Security Service → Software**
2. Enable **Prohibit PING**.
3. Click **Save**.

12.5 Set SDK Protocol Authentication Mode

When you need to operate development integration or data collection via SDK protocol, you are recommended to enable SDK protocol authentication to enhance the information security.

Steps

1. Go to **Configuration → System → Security → Security Service → Authentication Settings** .
2. Select **SDK Protocol Authentication Mode**.

   Note

   You are recommended to select **Safety Mode**. In this mode, the device cannot be logged in via an invertible password of SDK protocol, which can enhance the information security.
3. Click **Save**.

12.6 Set RTSP Authentication

You can improve network access security by setting RTSP authentication.

Steps

1. Go to **Configuration → System → Security → Security Service → Authentication Settings** .
2. Select **RTSP Authentication**.

   digest

   The device only supports digest authentication.
3. Click **Save**.

12.7 Set Timeout Logout

You can improve network access security by setting timeout logout.

Steps

1. Go to **Configuration → System → Security → Security Service → Login Management** .
2. Check **Enable Timeout Logout for Static Page**.

3. Set **Max. Timeout**.
4. Click **Save**.

Result

When the page static time exceeds the set time, the device will automatically log out.

12.8 Set Password Validity Period

You can improve network access security by setting password validity period.

Steps

1. Go to **Configuration → System → Security → Security Service → Login Management** .
2. Select **Password Validity Period**.
   - Select **Permanent**. The password will be permanently valid.
   - Select **Daily** and set **Password Expiry Time**. It will prompt you that the password is expired according to the set password expiry time, and you need to set the new password.
3. Click **Save**.

12.9 Set IP Address Filtering

You can set the IP addresses allowable and not allowable to access the device.

Steps

1. Go to **Configuration → System → Security → Security Settings** .
2. Enable IP address filtering.
3. Set **Filtering Mode**.

   Blocklist Mode

   The added IP addresses are not allowed to access the device.

   Allowlist Mode

   The added IP addresses are allowed to access the device.
4. Click **Add**, enter the IP address, and click **OK**.

   Note

   The IP address only refers to the IPv4 address.
5. **Optional:** Edit, delete, or clear the added IP addresses.
6. Click **Save**.

12.10 Set HTTPS

12.10.1 Create and Install Self-signed Certificate

HTTPS is a network protocol that enables encrypted transmission and identity authentication, which improves the security of remote access.

Steps

1. Go to **Configuration → Network → Network Parameters → HTTPS** .
2. Select **Create Self-signed Certificate**.
3. Click **Create**.
4. Follow the prompt to enter **Country/Region**, **Domain/IP**, **Validity**, and other parameters.
5. Click **OK**.

Result

The device will install the self-signed certificate by default.

12.10.2 Install Authorized Certificate

If the demand for external access security is high, you can create and install authorized certificate via HTTPS protocol to ensure the data transmission security.

Steps

1. Go to **Configuration → Network → Network Parameters → HTTPS** .
2. Select **Create certificate request first and continue the installation**.
3. Click **Create**.
4. Follow the prompt to enter **Country/Region**, **Hostname/IP**, **Validity**, and other parameters.
5. Click **Download** to download the certificate request and submit it to the trusted authority for signature.
6. Import certificate to the device.
   - Select **Signed certificate is available, start the installation directly**. Click **Browse** and **Install** to import the certificate to the device.
   - Select **Create the certificate request first and continue the installation**. Click **Browse** and **Install** to import the certificate to the device.
7. Click **Save**.

Chapter 13 Maintenance

13.1 View Device Information

Basic Information and Algorithm Version

Go to **Configuration → System → System Settings → Basic Information** to view the basic information and algorithm version of the device.
You can edit **Device Name** and **Device No.** The device No. is used to control the device. It is recommended to reserve the default value.

Device Status

Go to **Configuration → System → System Settings → Device Status** to view the device status, live view and arming status, data upload monitoring, and other status.

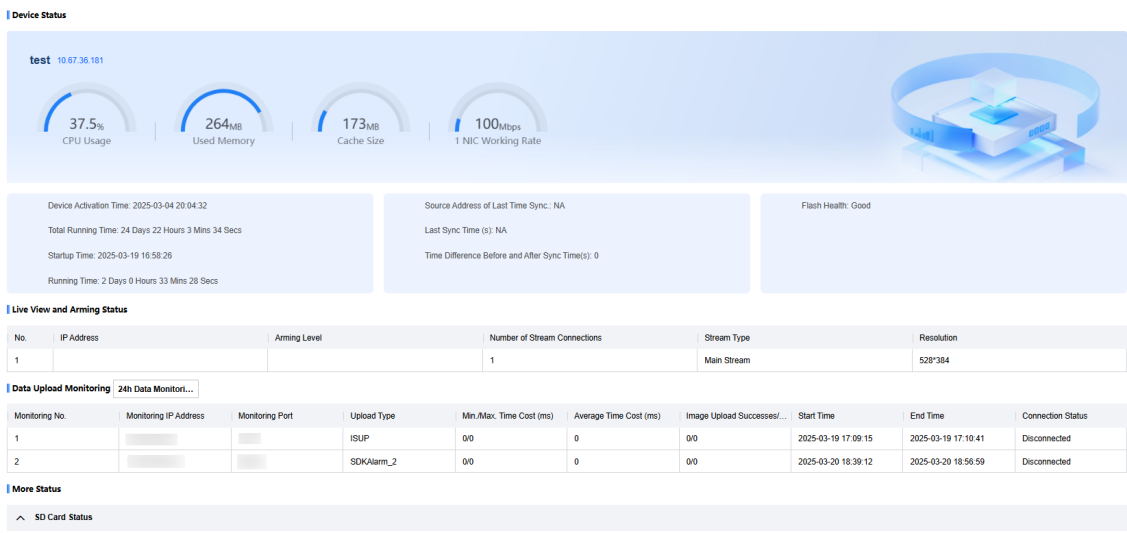

Figure 13-1 Device Status

For data upload monitoring, you can click **24h Data Monitoring**, and select the IP address of the picture upload server to view the data upload statistics in 24 hours. The statistics data will be cleared if the device is rebooted by default. You can enable **Flash Storage** and set **Flash Storage Days** to keep the statistics data not to be cleared when the device is rebooted within the set time.

13.2 Synchronize Time

Synchronize the device time when it is inconsistent with the actual time.

Steps

1. Go to **Configuration → System → System Settings → Time Settings → Sync Mode** .

2. Select **Time Zone**.
3. Select **Sync Mode**.

NTP Time Sync.

Select it to synchronize the device time with that of the NTP (Network Time Protocol) server. Set **Server IP**, **NTP Port**, and **Interval**. Click **NTP Test** to test if the connection between the device and the server is normal. You can check **Enable Alternate NTP Server** to guarantee the stability and reliability of NTP time sync. Then set the IP address and port of the alternate NTP server, and set the interval of alternate NTP time sync. Click **Alternate NTP Test** to test if the connection between the device and the alternate server is normal.

Manual Time Sync.

Select it to synchronize the device time with that of the computer. Set time manually, or check **Sync. with computer time**.

SDK

If the remote host has been set for the device, select it to synchronize time via the remote host.

ONVIF

Select it to synchronize time via the third-party device.

No

Select it to disable time synchronization.

All

Select it, and you can select any mode above.

Note

The time synchronization modes vary with different models. The actual device prevails.

4. Click **Save**.

13.3 Set DST

If the region where the device is located adopts DST (Daylight Saving Time), you can set this function.

Steps

1. Go to **Configuration → System → System Settings → Time Settings → DST** .
2. Enable **DST**.
3. Set **Start Time**, **End Time**, and **DST Bias**.
4. Click **Save**.

13.4 Set RS-485

Set RS-485 parameters if the device has been connected to a vehicle detector or other RS-485 devices.

Before You Start
The corresponding device has been connected via the RS-485 serial port.

Steps

Note
The number of available RS-485 serial port varies with different models.

1. Go to **Configuration → System → System Settings → Serial Port → RS-485** .
2. Set **Baud Rate**, **Data Bit**, **Stop Bit**, etc.

   Note
   The parameters should be same with those of the connected device.
3. Set **Work Mode**.

   Transparent Channel

   Select it when the other peripheral devices are connected to the RS-485 serial port of the device for communication transmission.

   LED Display

   Select it when the LED display is connected to the device via RS-485 serial port.

   License Plate Transmission

   Select it to transmit the recognized license plate information to the other peripheral devices via RS-485 serial port.
4. Click **Save**.

13.5 Set RS-232

Set RS-232 parameters if you need to debug the device via RS-232 serial port, or peripheral devices have been connected.

Before You Start
The debugging device has been connected via the RS-232 serial port.

Steps
1. Go to **Configuration → System → System Settings → Serial Port → RS-232** .
2. Set **Baud Rate**, **Data Bit**, **Stop Bit**, etc.

Note

The parameters should be same with those of the connected device.

3. Select **Work Mode**.

Console

Select it when you need to debug the device via RS-232 serial port.

Transparent Channel

Select it, and the network command can be transmitted to RS-232 control command via the RS-232 serial port.

Narrow Bandwidth Transmission

Reserved.

4. Click **Save**.

13.6 Download Debug Data

You can search and download the diagnostics information of the device to troubleshoot and maintain the device.

Steps

1. Go to **Configuration → System → Maintenance → Debug Data Download** .

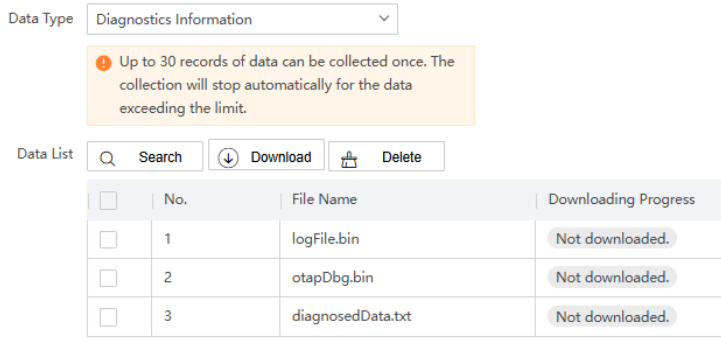

Figure 13-2 Download Debug Data

2. Select **Data Type**.

Diagnostics Information

The diagnostics information includes kernel, status, version information, etc.

Video BAYER/Capture Picture BAYER

Go to **Configuration → Capture → Advanced → System Service** to select the bayer data types to be saved. Click **Start** to start collection, and click **Finish** to finish collection.

Capture Picture YUV

To collect the YUV data of the captured pictures. Click **Start** to start collection, and click **Finish** to finish collection.

Note

Up to 30 records of data can be collected once. The collection will stop automatically for the data exceeding the limit.

3. Click **Search** to search the data list.
4. Select the file(s) to be downloaded, and click **Download** to download the file(s). You can view the downloading progress.
5. **Optional:** Select the file(s) to be deleted, and click **Delete** to delete the file(s).

13.7 Search Log

Log helps to locate and troubleshoot problems.

Steps

1. Go to **Configuration → System → Maintenance → Log Search** .
2. Set search conditions.
3. Click **Configuration** to select the logs to be searched according to modules or enable system log service.
   1) Select the module(s) from the dropdown list of **Enable According to Module**.
   2) Enable the functions below.

      Disable Log Automatically

      Enable the function to disable the log automatically, and set **Auto Disabling Time**.

      Enable System Log Service

      The security audit logs refer to the security operation logs. You can search and analyze the security log files of the device so as to find out the illegal intrusion and troubleshoot the security events. Security audit logs can be saved on device internal storage. The log will be saved every half hour after device booting. Due to limited storage space, you are recommended to save the logs on a log server. Enter **IP Address** and **Port** of the log server.
   3) Click **OK**.
4. Click **Search**.

   The matched log files will be displayed on the log list.
5. **Optional:** Click **Export** to save the log files to your computer.

13.8 Reboot

When the device needs to be rebooted, reboot it via the software instead of cutting off the power directly.

Steps

1. Go to **Configuration → Upgrade & Maintenance → Device Maintenance** .

2. Click **Reboot**.
3. Click **OK** to reboot the device.

Note

You can also click on the upper right corner of the interface to reboot the device.

13.9 Restore Parameters

When the device is abnormal caused by the incorrect set parameters, you can restore the parameters.

Steps

1. Go to **Configuration → Upgrade & Maintenance → Device Maintenance** .
2. Select the restoration mode.
   - Click **Restore** to restore the parameters except the IP address, subnet mask, gateway, and port No. to the default settings.
   - Click **Restore Factory Settings** to restore all the parameters to the factory settings.
3. Click **OK**.

13.10 Export Parameters

You can export the parameters of one device, and import them to another device to set the two devices with the same parameters.

Steps

1. Go to **Configuration → Upgrade & Maintenance → Backup and Import Parameters** .
2. Click **Export** after **Configuration Parameters**.
3. Set an encryption password, confirm the password, and click **OK**.

   Note

   The password is used for importing the configuration file of the current device to other devices.
4. Select the saving path, and enter the file name.
5. Click **Save**.

13.11 Import Configuration File

Import the configuration file of another device to the current device to set the same parameters.

Before You Start

Save the configuration file to the computer.

Steps

Caution

Importing configuration file is only available to the devices of the same model and same version.

1. Go to **Configuration → Upgrade & Maintenance → Backup and Import Parameters** .
2. Select **Importing Method**.

   Note

   If you select **Import Part**, select **Partially Imported Information**.
3. Click **Browse** to select the configuration file.
4. Click **Import**.
5. Enter the password which is set when the configuration file is exported, and click **OK**.
6. Click **OK** on the popup window.

Result

The parameters will be imported, and the device will reboot.

13.12 Upgrade

Upgrade the system when you need to update the device version.

Before You Start

- Update the plugin before upgrade.
- Prepare the upgrade file in .dav format.

Steps

1. Go to **Configuration → Upgrade & Maintenance → Import Upgrade File** .
2. Click **Browse** to select the upgrade file.
3. Click **Upgrade**.
4. Click **OK** in the popup window.

   Note

   The upgrading process will take minutes. Do not power off the device. The device will restart automatically after upgrading. If the network condition is poor, it may take more time.

Result

The device will reboot automatically after upgrade.

See Far, Go Further

UD44287B